



NEW RESULTS ON FOCUSING DIRC



Outline:

- DIRC Concept
- BABAR-DIRC Performance
- R&D for Focusing DIRC
 - Prototype Design
 - Photodetector Selection
 - Performance in Beam Test

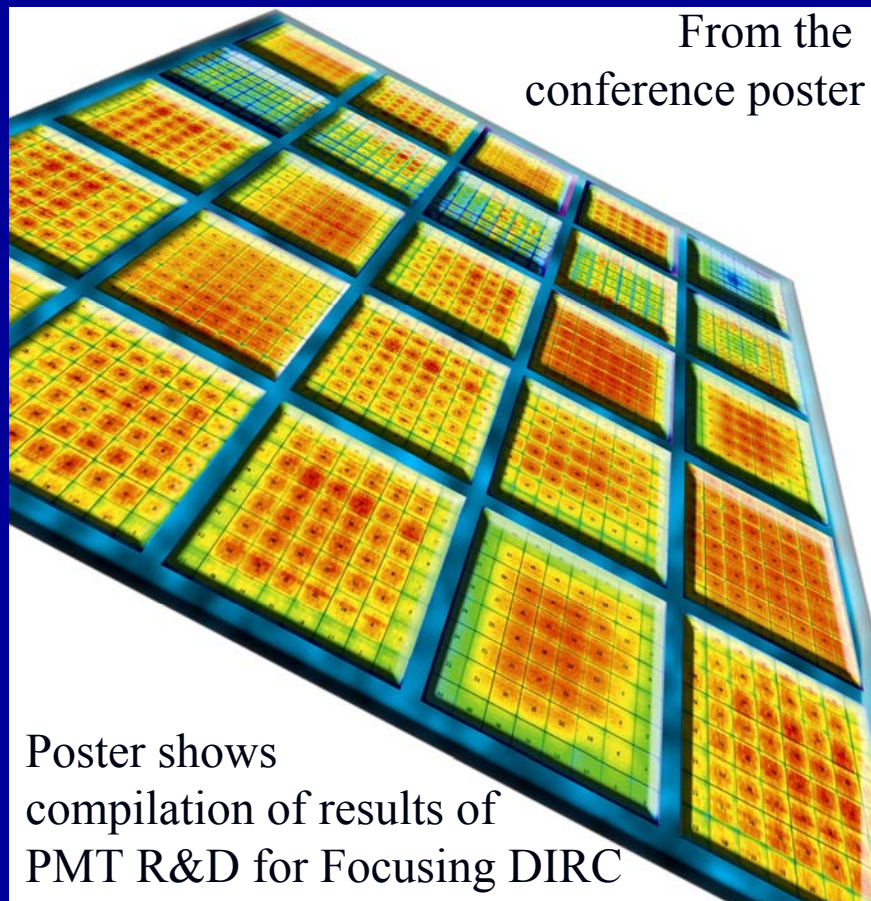

Poster shows
compilation of results of
PMT R&D for Focusing DIRC

Jochen Schwiening
for the Focusing DIRC
group at SLAC

DIRC CONCEPT

DETECTION OF INTERNALLY REFLECTED CHERENKOV LIGHT

Novel Ring Imaging CHerenkov detector §

based on total internal reflection of Cherenkov light

used for the first time in BABAR for hadronic particle identification

Recent improvements in photon detectors have motivated R&D efforts to improve the successful BABAR-DIRC and make DIRCs interesting for future experiments (Super B-Factory, Panda, GlueX, ILC)

Focusing DIRC R&D group at SLAC:


- Ivan Bědajánek
- Jonathon Coleman
- Gholam Mazaheri
- Jochen Schwiening
- Jaroslav Va'vra
- Jose Benitez
- David W.G.S. Leith
- Blair N. Ratcliff
- Josef Uher

Acknowledgements:

- M. McCulloch and B. Reif (prototype construction)
- M. Barnyakov, M. Ji, S. Kononov, and K. Suzuki (beam test)

§B.N. Ratcliff, SLAC-PUB-6047 (Jan. 1993)

DIRC DESIGNS

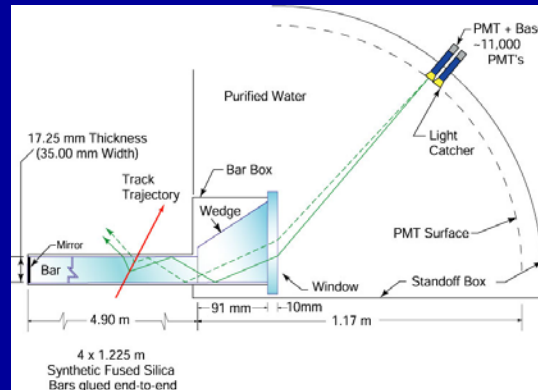


BABAR-DIRC *operating since 1999*

3D imaging

- a) x-coordinate
- b) y-coordinate
- c) time ($\sigma \approx 1.7\text{ns}$)

PID primarily from x&y coordinates

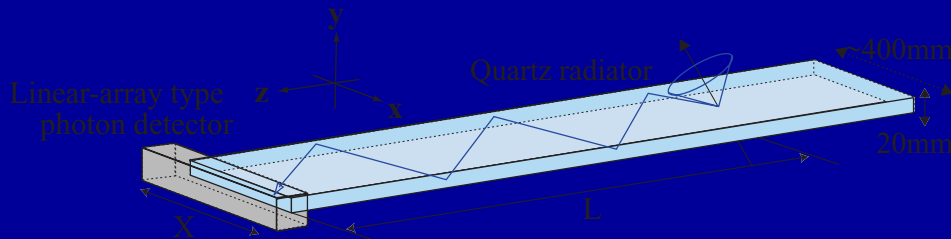


TOP counter (Nagoya) *proposed for BELLE*

2D imaging

- a) x-coordinate
- b) time ($\sigma < 100\text{ps}$)

PID from x&time coordinates

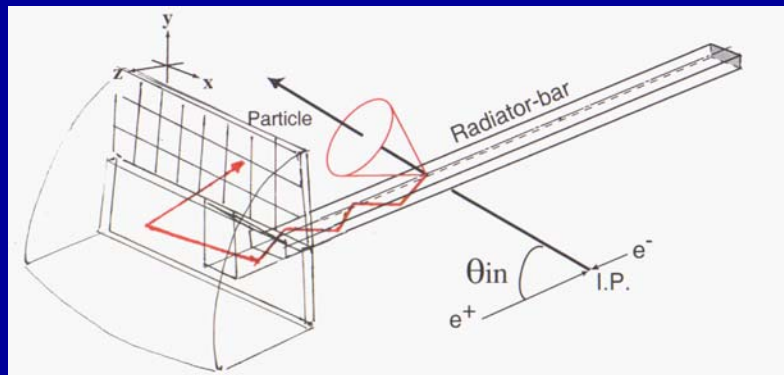

Focusing DIRC prototype (SLAC):

3D imaging

- a) x-coordinate
- b) y-coordinate
- c) time ($\sigma < 130\text{ps}$)

PID from all three coordinates

FOCUSING DIRC R&D ROADMAP

Work with manufacturers to develop and characterize one or more fast, pixelated photon detectors including;

- basic issues such as cross talk, tube lifetime, and absolute efficiency
- operation in 15 kG field


Measure timing resolution, uniformity, and cross talk in lab using a test beam

Measure single photon Cherenkov angular resolution in a test beam

- use a prototype with a small expansion region and mirror instrumented with a number of candidate pixelated photon detectors (5 ps) timing electronics.
- use 3D imaging (x&y coordinate and time) over-constraint very useful to deal with backgrounds and to develop corrections
- demonstrate performance parameters
- demonstrate correction of chromatic production term via precise timing
- measure N_0 and timing performance of candidate detectors.


ALL FOCUSING DIRC RESULTS SHOWN TODAY ARE PRELIMINARY.

See also poster #222
“Progress on the Focusing DIRC R&D”
J. Benitez et al.

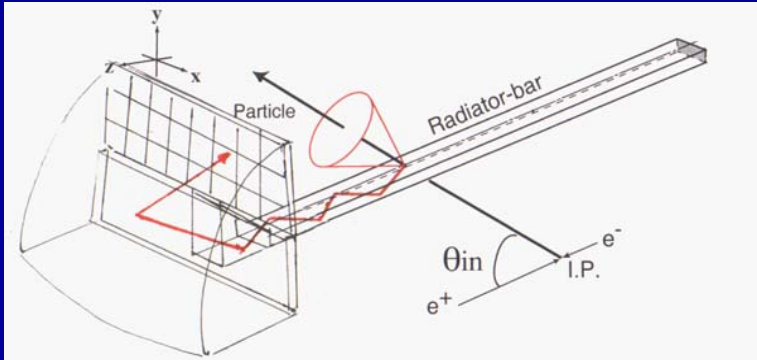


BABAR-DIRC PRINCIPLE

- Charged particle traversing a radiator with refractive index n with $\beta = v/c > 1/n$ emits Cherenkov photons on cone with half opening angle $\cos \theta_c = 1/\beta n(\lambda)$.
- If $n > \sqrt{2}$ some photons are always **totally internally reflected** for $\beta \approx 1$ tracks.
- **Radiator and light guide**: Long, rectangular Synthetic Fused Silica (“Quartz”) bars (*Spectrosil*: average $\langle n(\lambda) \rangle \approx 1.473$, radiation hard, homogenous, low chromatic dispersion)

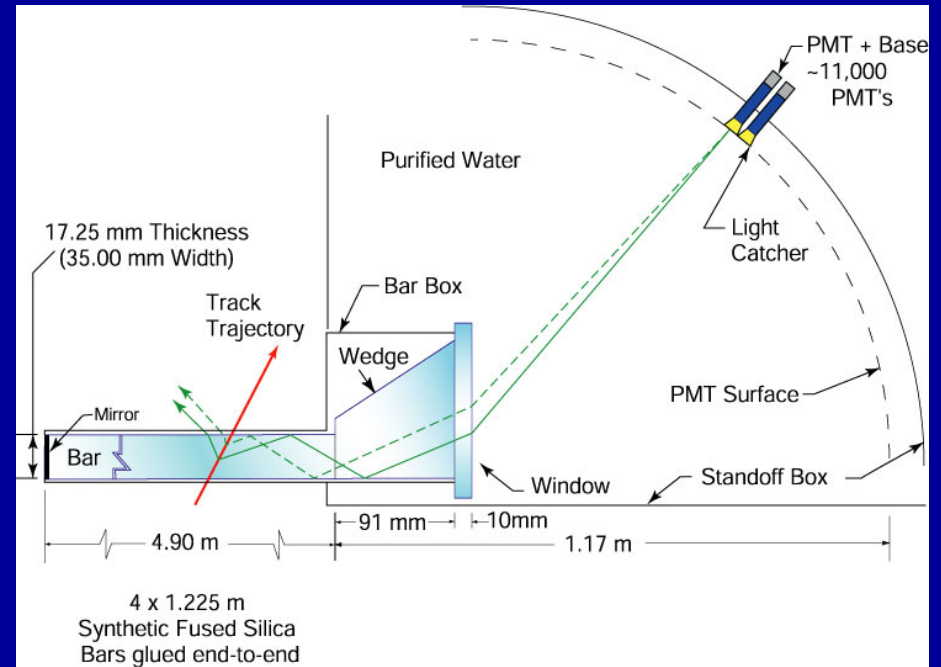

- Photons exit via wedge into expansion region (filled with 6m^3 pure, de-ionized water).
- Pinhole imaging on **PMT array** (bar dimension small compared to standoff distance).
(10,752 traditional PMTs ETL 9125, immersed in water, surrounded by hexagonal “light-catcher”, transit time spread $\sim 1.5\text{nsec}$, $\sim 30\text{mm}$ diameter)
- **BABAR-DIRC is a 3-D device**, measuring: x , y and time of Cherenkov photons, defining θ_c , ϕ_c , $t_{\text{propagation}}$ of photon.

(time measurement used primarily for rejecting accelerator background and resolving ambiguities)

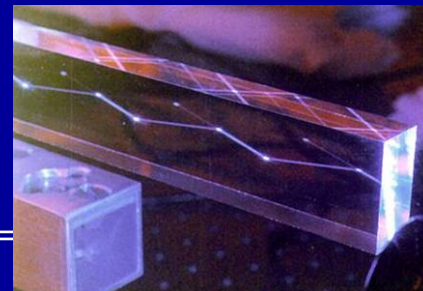

BABAR-DIRC OPERATIONAL EXPERIENCE

Over six years of experience in PEP-II/BABAR B-factory mode §:

DIRC is reliable, robust, easy to operate

- DIRC reached performance close to design within first year of running.
- DIRC plays significant role in almost all BABAR physics analyses.
- Calibration constants stable to typically $rms < 0.1ns$ per year.
- 98% of channels fully functional after 7+ years immersed in ultra-pure water.
- No problems with water or gas systems.

Most significant operational issue: sensitivity to accelerator induced background interacting in the water of the Standoff Box (primarily a DAQ issue)

→ Added additional shielding; upgraded TDCs in 2002.


→ Time measurement essential in dealing with backgrounds.

§Nucl. Instrum. Meth. A502 (2003) 67

BABAR-DIRC RESOLUTION


Single Photon resolution

$$\sigma(\Delta\theta_{c,\gamma}) = 9.6 \text{ mrad}$$

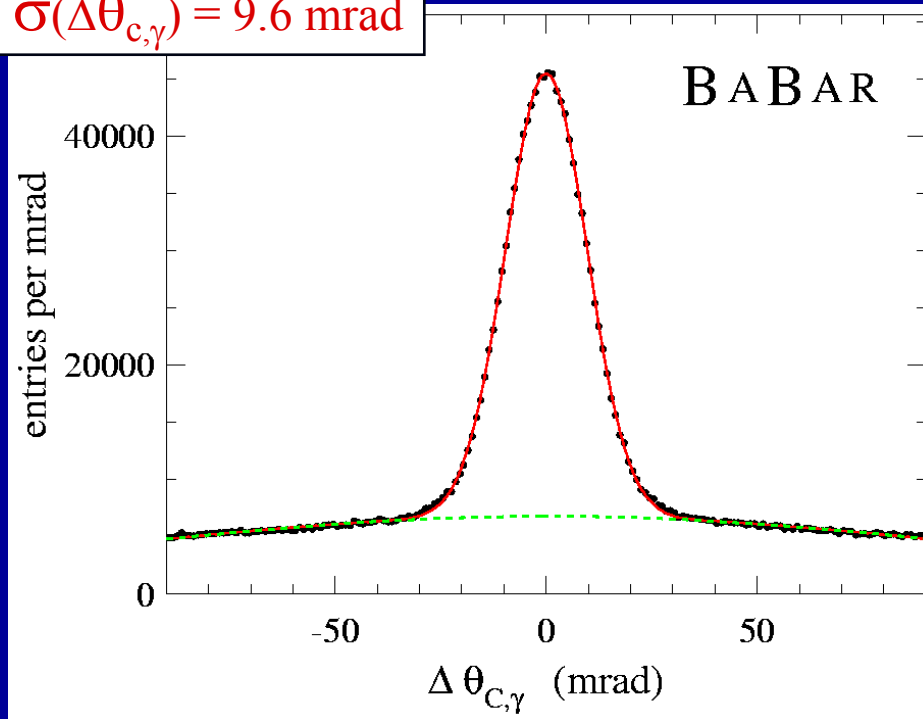

$\Delta\theta_{c,\gamma}$: difference measured $\theta_{c,\gamma}$ per photon and expected track θ_c (di-muons)

$$\sigma(\Delta t_\gamma) = 1.7 \text{ nsec}$$

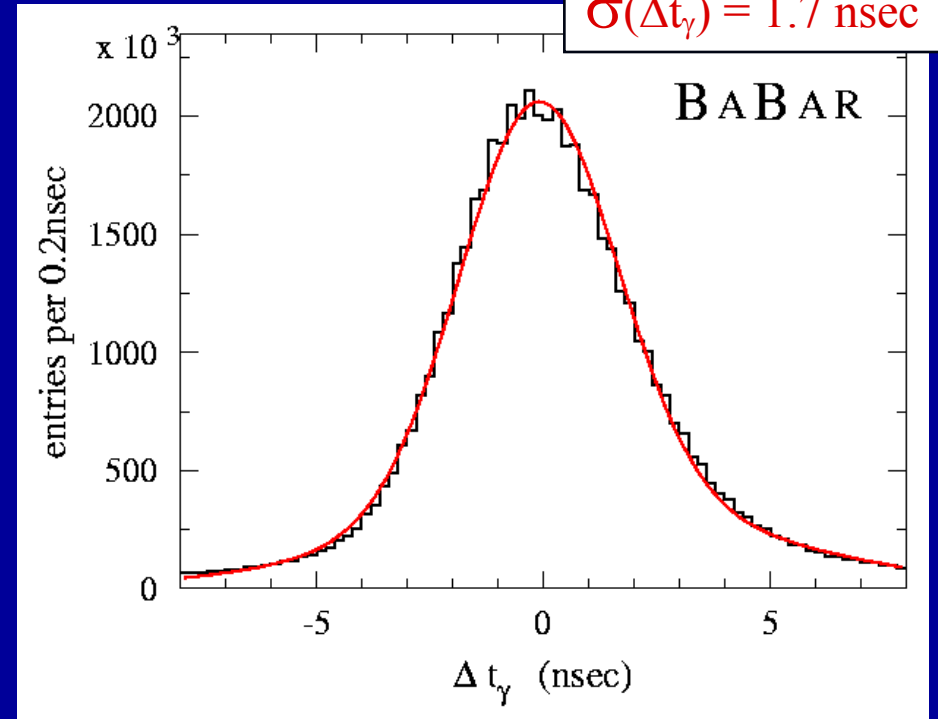

Δt_γ : difference between measured and expected photon arrival time


Nucl. Instrum. Meth. A502 (2003) 67

BABAR-DIRC PID PERFORMANCE

π/K separation power:

Measure Cherenkov angle resolution as function of track momentum for pions and kaons, kinematically identified in D^* decays ($D^{*-} \rightarrow D^0 \pi^-$, $D^0 \rightarrow K^- \pi^+$).

→ about 4.3σ separation at $3\text{GeV}/c$, close to 3σ separation at $4\text{GeV}/c$

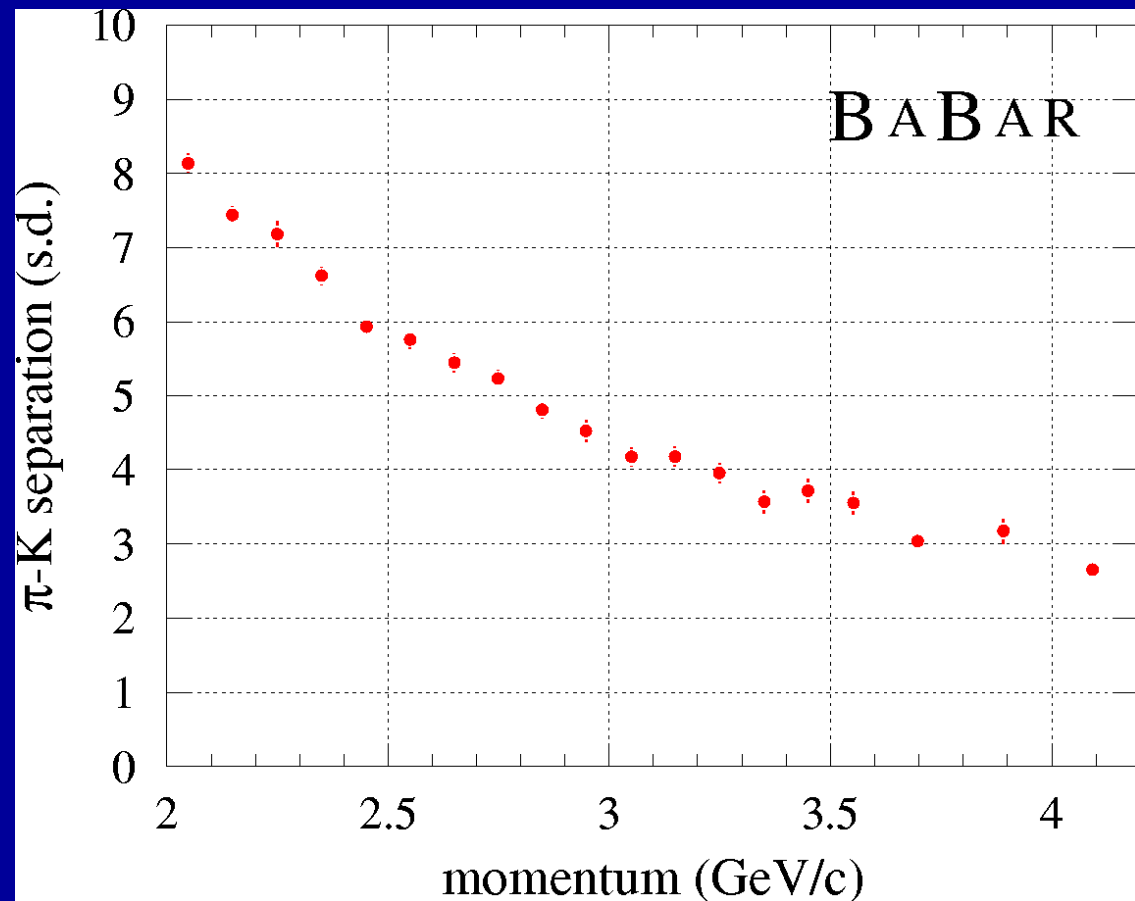

Nucl. Instrum. Meth. A502 (2003) 67

BABAR-DIRC PERFORMANCE

Typical PMT hit rates: **200kHz/PMT** (*few-MeV photons from accelerator interacting in water*)
 Timing resolution: **1.7ns per photon** (*dominated by transit time spread of ETL 9125 PMT*)
 Photon yield: **18-60 photoelectrons per track** (*depending on track polar angle*)
 Cherenkov angle resolution: **9.6mrad per photon** → **2.4mrad per track**

Limited by

Size of bar image	~ 4.1mrad
Size of PMT pixel	~ 5.5mrad
Chromaticity ($n=n(\lambda)$)	~ 5.4mrad


BABAR-DIRC

Improvement strategy

Focusing optics
 Smaller pixel size
 Better timing resolution

Focusing DIRC

→ Improve single photon timing and angular resolution, decrease size of Cherenkov ring expansion region

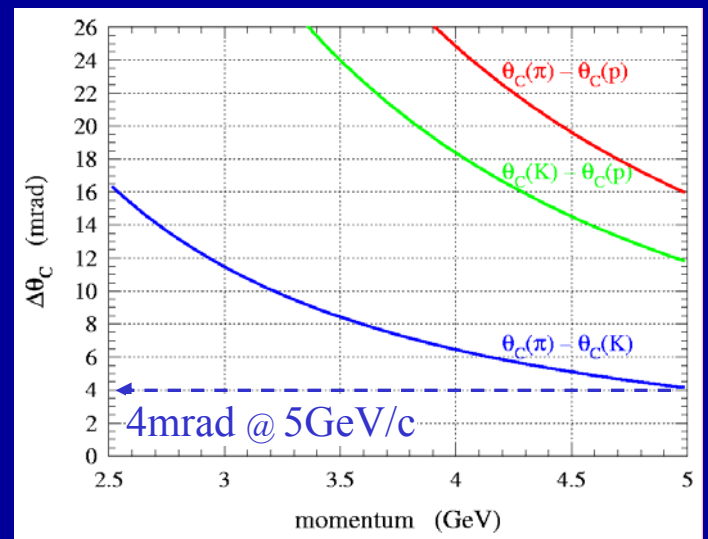


CHROMATIC EFFECTS IN DIRC

DIRC detector bandwidth

Defined by choice of photodetector, glue, medium in expansion region, and loss during photon propagation.

Optimization: smaller bandwidth → fewer signal photons, smaller chromatic error

Typical DIRC bandwidth: $\lambda=300\dots650\text{nm}$, $\langle\lambda\rangle=410\text{nm}$

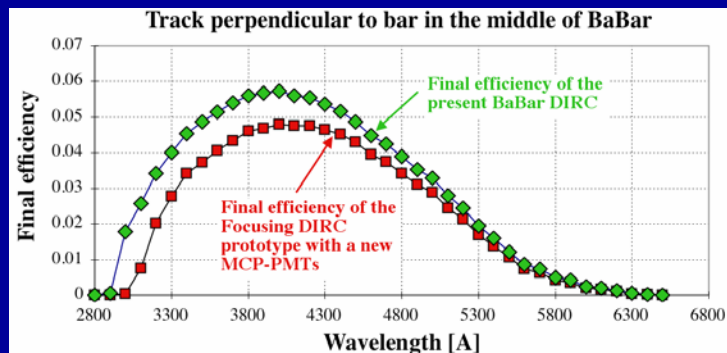

Chromatic effect at Cherenkov photon production

Cherenkov photons produced according to $\cos \theta_c(\lambda) = 1/\beta n(\lambda)$

$n(\lambda)$: refractive (phase) index $n(\lambda)=1.49\dots1.46$

$\theta_c(\lambda)$: opening angle of Cherenkov cone $\theta_c(\lambda, \beta=1)=835\dots815\text{mrad}$


Chromatic time dispersion during photon propagation

Photons propagate in dispersive medium with group index $n_g(\lambda)$

time-of-propagation = path-in-bar $\cdot n_g(\lambda) / c_0$

$n_g(\lambda)$: group index $n_g(\lambda)=1.57\dots1.47$

Red photons propagate faster than blue photons

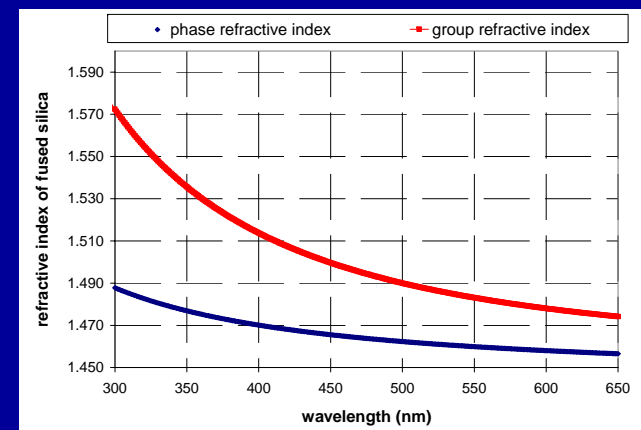

PHOTODETECTOR SELECTION

Main criteria for selection


- **Timing resolution**
timing resolution $\sigma_t < 200\text{ps}$ required for chromatic correction
- **Pixel size**
small pixels allow reduction of size of expansion region
without compromising angular resolution
- **Single photon efficiency**
need quantum efficiency $\sim 20\text{-}30\%$ and $>70\%$ packing
efficiency to match BABAR-DIRC photon yield

Main candidates

- Burle 85011-501 MCP-PMT
- Burle 85011-430 MCP-PMT
- Burle 85021-600 MCP-PMT
- Hamamatsu H-8500 Multianode PMT
- Hamamatsu H-9500 Multianode PMT

Measure timing resolution, uniformity, and cross talk

- PiLas laser diodes (35ps FWHM, $\lambda = 407 / 635 \text{ nm}$)
- Scan PiLas across PMT face using motion-controlled
x&y stage (typical step size 200-500 μm)

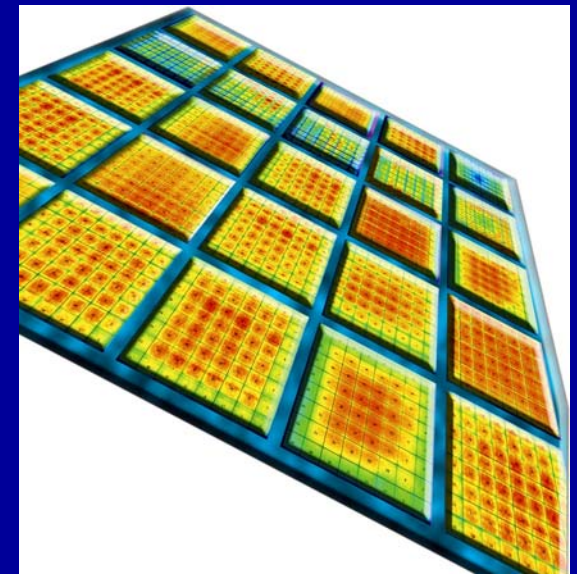

Compilation of 25 scans
different PMTs and wavelengths


BURLE 8501 1-501




Burle 85011-501 MCP-PMT

- 64 pixels (8×8), 6.5mm pitch
- bialkali photocathode
- 25μm pore MCP, 6mm MCP-cathode distance
- gain $\sim 5 \times 10^5$
- timing resolution ~ 70 ps, distribution has tail
- good uniformity

→ IEEE NSS 2003

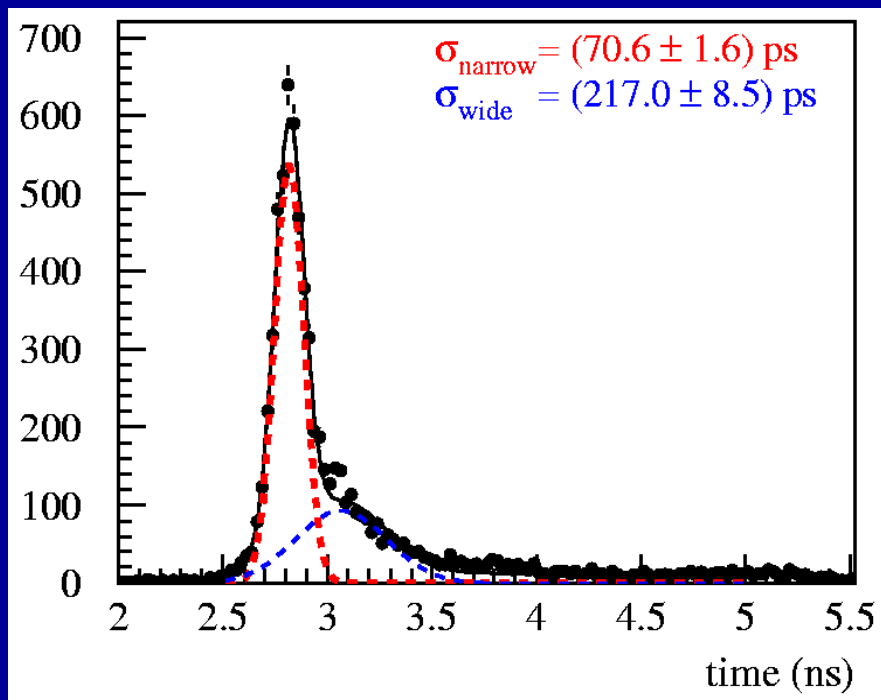

Efficiency relative to Photonis PMT

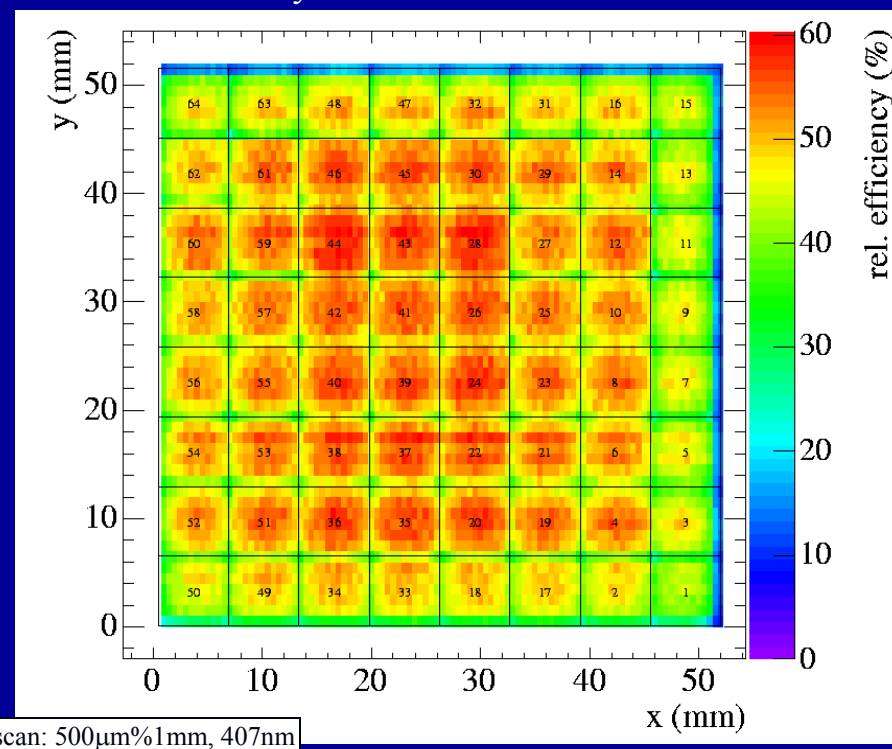

HAMAMATSU H-8500


H8500




Hamamatsu H-8500 Flat Panel Multianode PMT

- 64 pixels (8×8), 6.1 mm pitch
- bialkali photocathode
- 12 stage metal channel dynode
- gain $\sim 10^6$
- timing resolution ~ 140 ps

→ IEEE NSS 2003

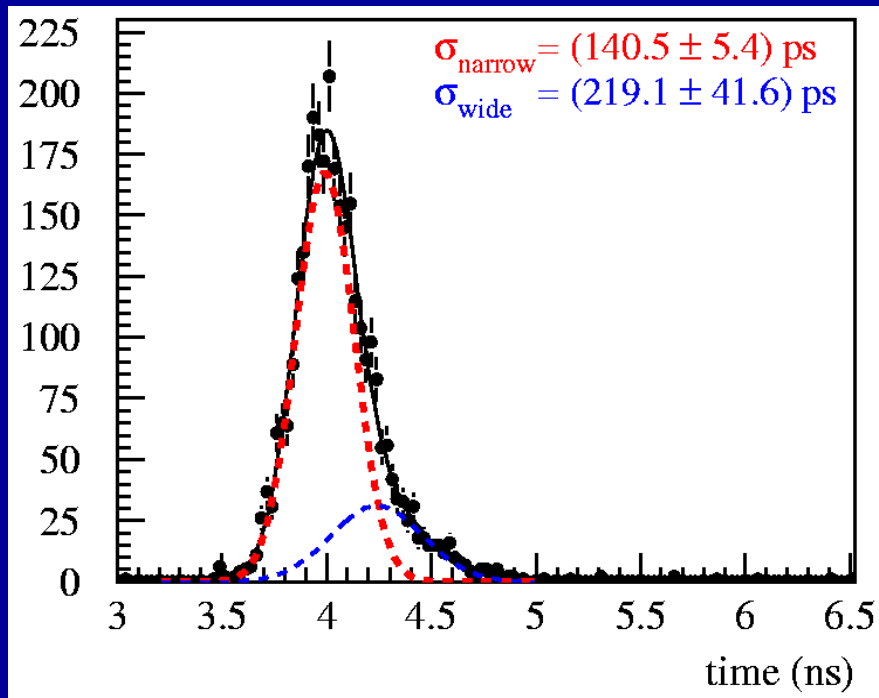

Efficiency relative to Photonis PMT

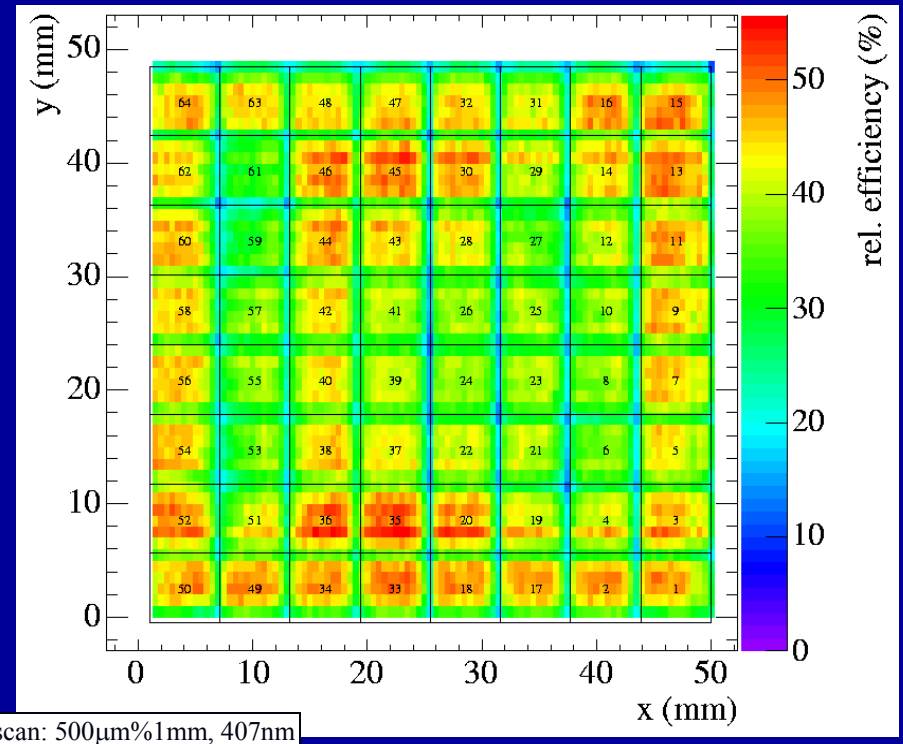

DETECTOR OPTICS

Radiator

- use 3.7m-long bar made from three spare high-quality BABAR-DIRC bars
- use same glue as BABAR-DIRC (Epotek 301-2), wavelength cut-off at 300nm

Expansion region


- use smaller stand-off distance (25% of BABAR-DIRC)
- coupled to radiator bar with small fused silica block (RTV SES-403)
- filled with mineral oil (KamLand experiment) to match fused silica refractive index
- include optical fiber for electronics calibration
- would ultimately like to use solid fused silica block

Focusing optics

- spherical mirror from SLD-CRID detector (focal length 49.2cm)

Photon detector


- use array of flat panel PMTs focal plane
- readout to CAMAC/VME electronics

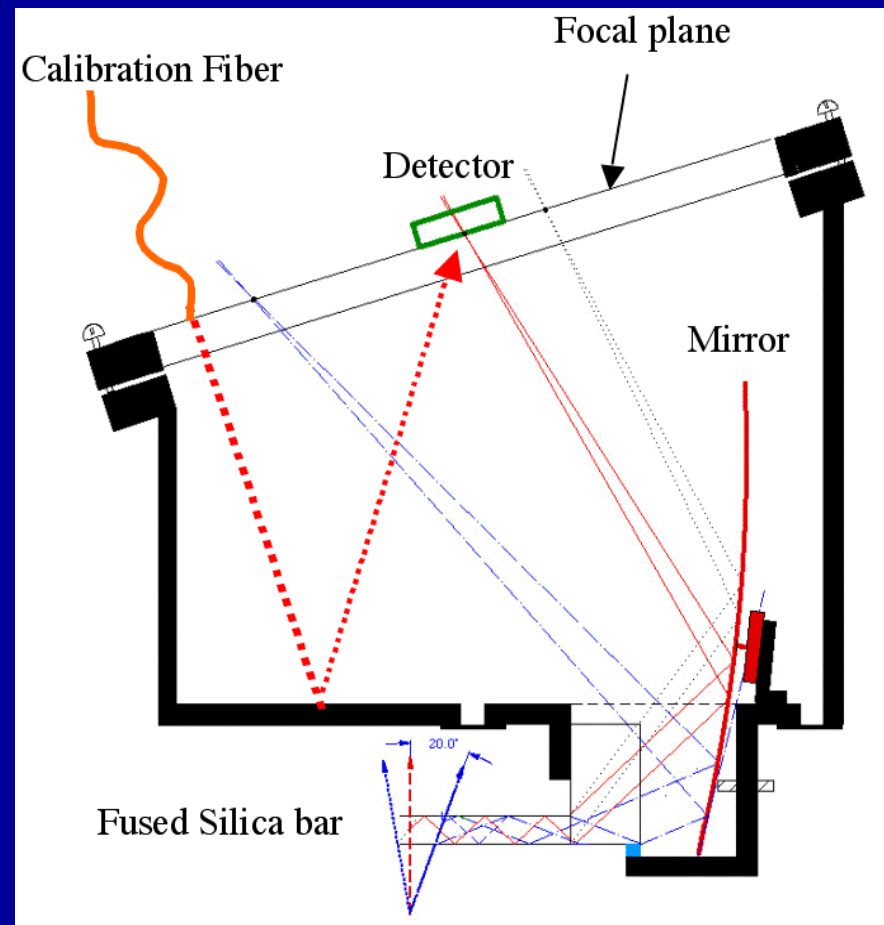

PROTOTYPE READOUT

For 2005 beam tests read out two Hamamatsu H-8500 MaPMTs and three Burle 85011-501 MCP-PMTs (total of 320 pixels)

- Elantec 2075EL amplifier (130x) on detector backplane
- SLAC-built constant fraction discriminator
- Ten Phillips 7186 TDCs (25ps/count) for 160 channels
- Four SLAC-built TDC boards: TAC & 12 bit ADC (~31ps/count) for 128 channels
- Read out only pixels close to expected hit pattern of Cherenkov photons
(155 pixels used in analysis shown today)
- Calibration with PiLas laser diode (~35ps FWHM) to determine and monitor TDC channel delays and ps/count calibration

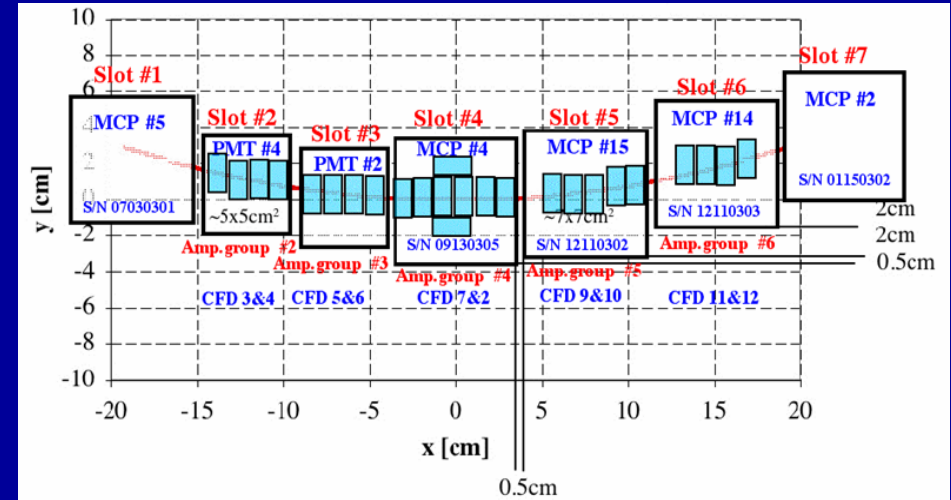


Photodetector coverage in focal plane

Reconstruction:

nice aspect of DIRC: geometry plus simple optics defines many photon properties


→ Pixel with hit ($x_{det}, y_{det}, t_{hit}$) defines 3D photon propagation vector in bar and Cherenkov photon properties (assuming 90° track, $\beta=1$, $\langle\lambda\rangle=410nm$)

$\alpha_x, \alpha_y, \cos \alpha, \cos \beta, \cos \gamma, L_{path}, n_{bounces}, \theta_c, \phi_c, t_{propagation}$

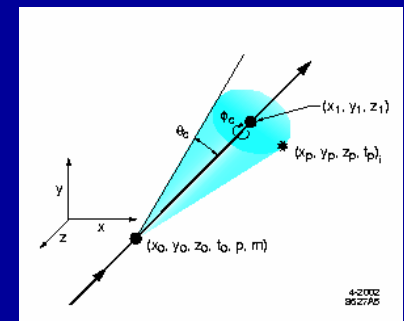




BEAM TEST SETUP

- Prototype located in beam line in **End Station A at SLAC**
- Accelerator delivers **10 GeV/c electron beam (e^-)**
- Beam enters bar at **90° angle**.
- 10 Hz pulse rate, approx. 0.1 particle per pulse
- Bar contained in aluminum support structure
- Beam enters through thin aluminum foil windows
- **Bar can be moved along long bar axis** to measure photon propagation time for various track positions
- Trigger signal provided by accelerator
- Fiber **hodoscope** (16+16 channels, 2mm pitch) measures 2D beam position and track multiplicity
- **Cherenkov counter** and **scintillator** measure event time
- **Lead glass calorimeter** selects single electrons
- All beam detectors read out via CAMAC (LeCroy ADCs and TDCs, Phillips TDC, 57 channels in total)

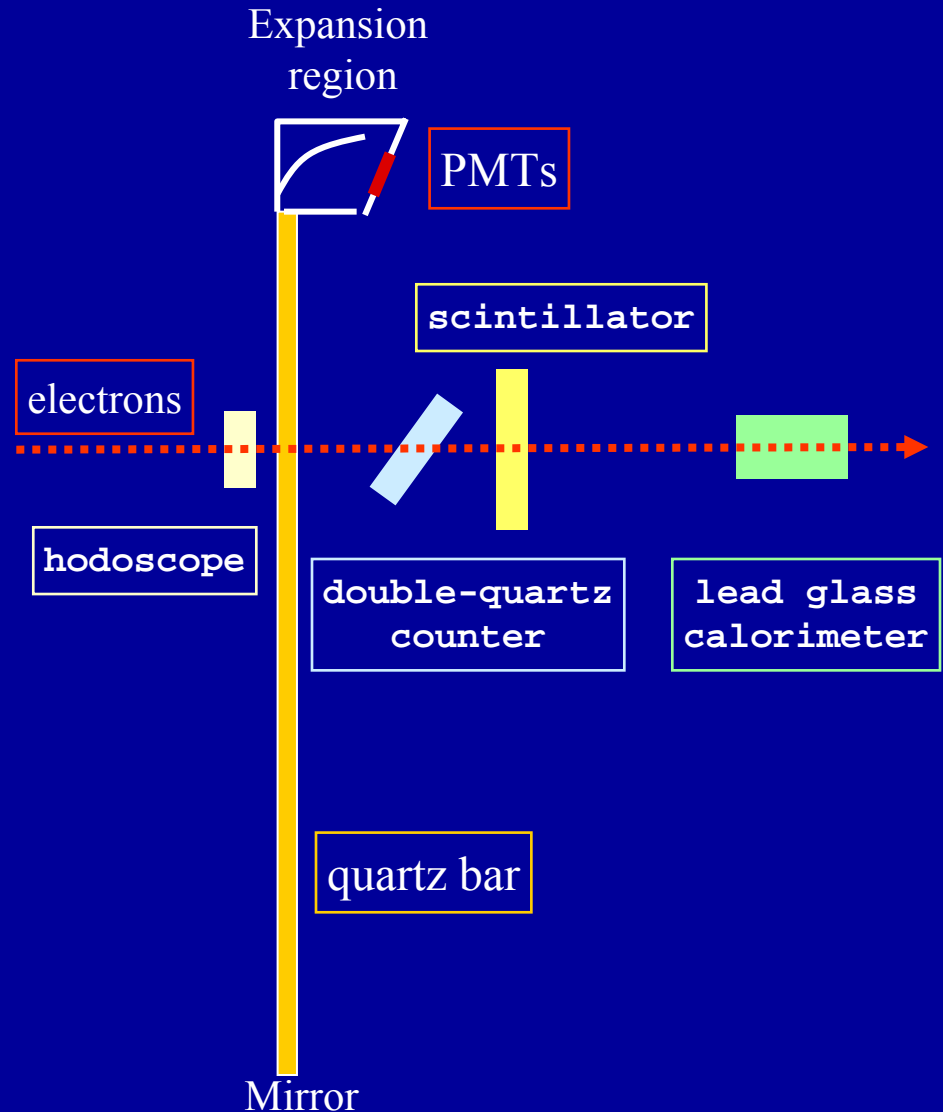

BEAM TEST DATA

- In July, August, and November 2005 we took beam data during five periods, lasting from few hours to several days.
- Total of **4.1M triggers** recorded, 10 GeV/c e^-
- Reconstructed **~200k good single-track events**
- Beam entered the radiator bar in **7 different locations**.
- Recorded between 100k and 700k triggers in each beam location.
- Photon **path length** range: **0.75m – 11m**.
- Simulated full detector with all efficiencies in **Geant4**.

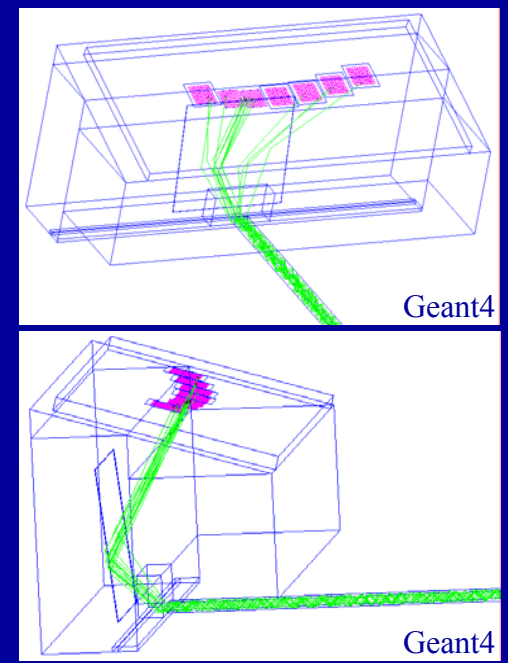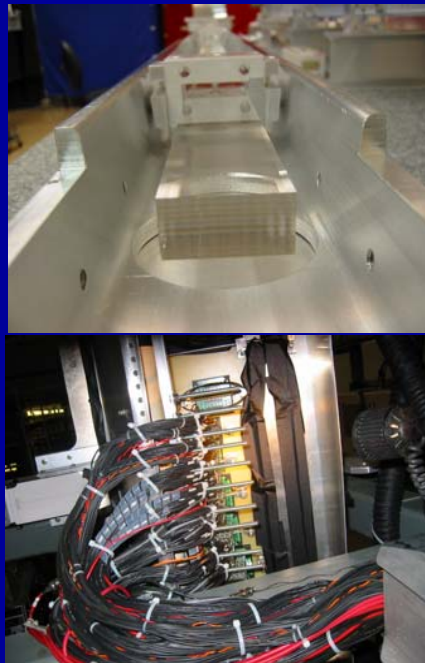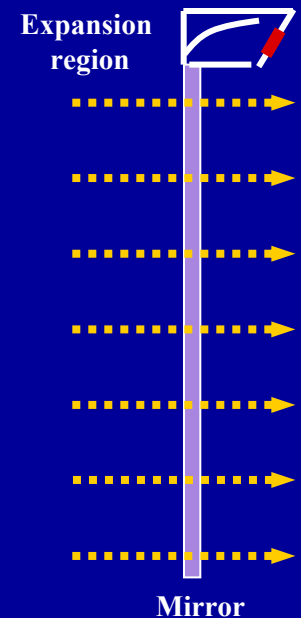

BEAM DETECTORS


Event selection:

- require single track signal in hodoscope
- require charge in lead glass to be consistent with single electron
- require start counter TDC signal in expected time window

Data corrections:


- use hodoscope beam spot to correct the path of photons in bar
- use ADC measurement in start counters to correct TDC value for time walk
→ resulting start counter resolution $\sim 35\text{ps}$
- use PiLas laser diode to calibrate prototype TDCs and cable delays
→ all pixels aligned in time

Lead glass: single track ADC distribution

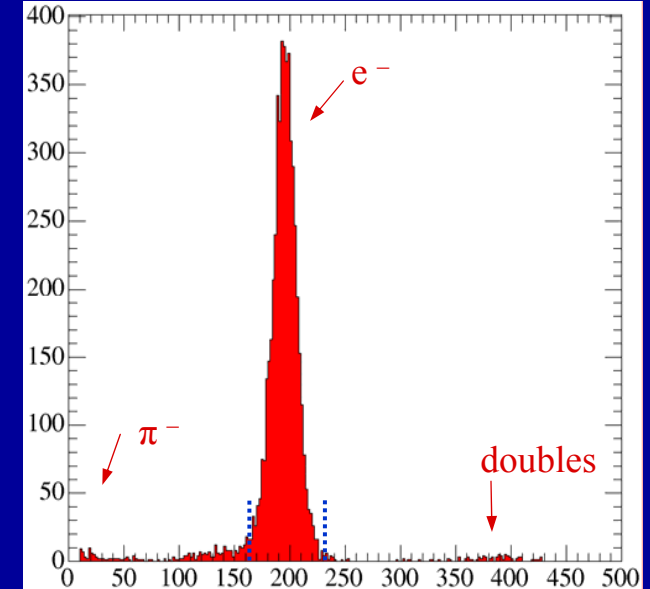

Charge (ADC counts)






Start counters: corrected event time

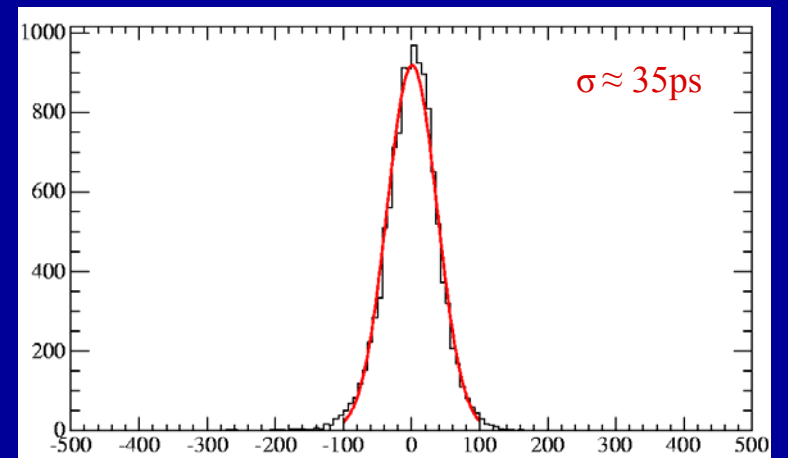

Corrected time (ps)


OCCUPANCY AND CHERENKOV ANGLE

Occupancy for accepted events in one run, 400k triggers, 28k events



Cherenkov angle for all pixels with signal

- Have to assign angles to pads assuming that photons hit center of pad (*single photons, no center-of-gravity interpolation possible*)
- clear pixelization effect visible, θ_c resolution $\approx 14\text{-}16\text{mrad}$ (total pixel size $\approx 21\text{mrad}$ in θ_c space)
- θ_c resolution from pixels worse than expected, should improve with better alignment (*plus systematic checks of hardware, calibration, and software*)

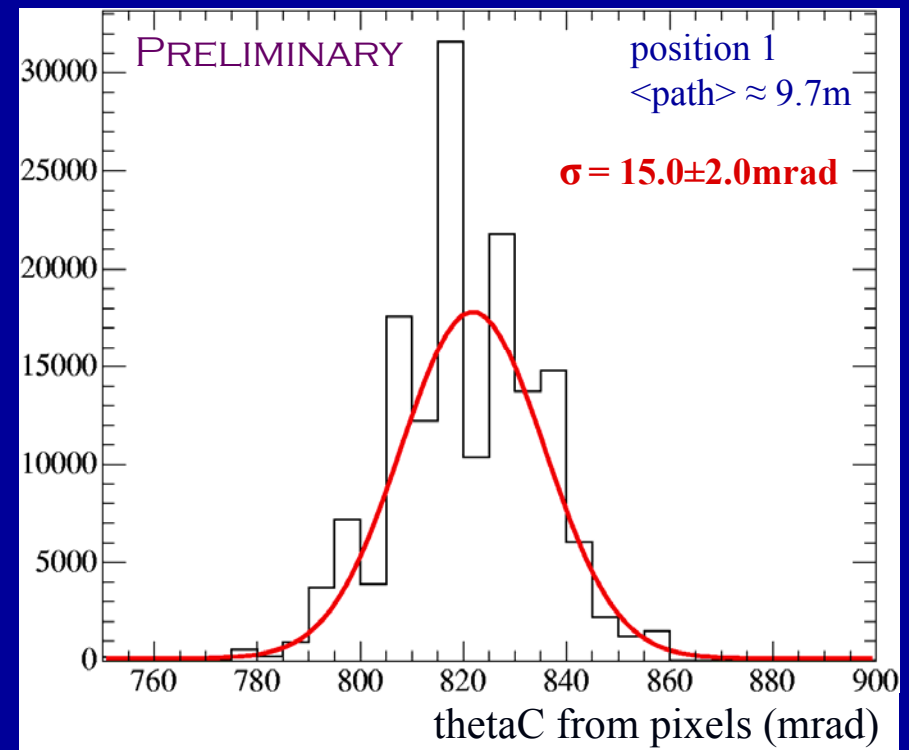

TIME MEASUREMENT





Precise timing at 50ps level requires

- careful calibration of TDC conversion factor
Phillips 7186: nominal 25ps/count, varies across measurement range
- monitoring of electronics delays to correctly align pixels in time space
temperature variations in hall matter
- use accelerator trigger signal as event time and monitor event time using start counter (35ps resolution)
- correction for charge-sharing and cross talk

Challenging task, PiLas calibration system very important

Results shown today do not have final calibrations and delays yet

PiLas calibration of 10 Phillips 7186 TDCs

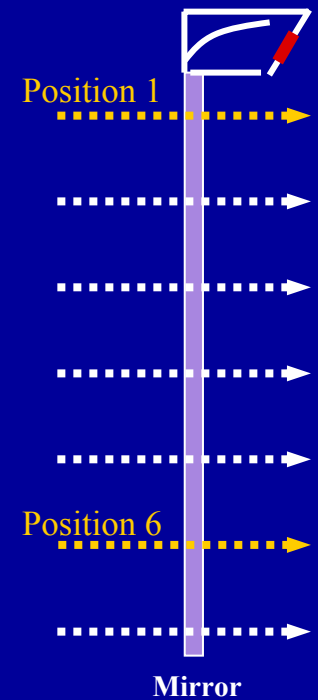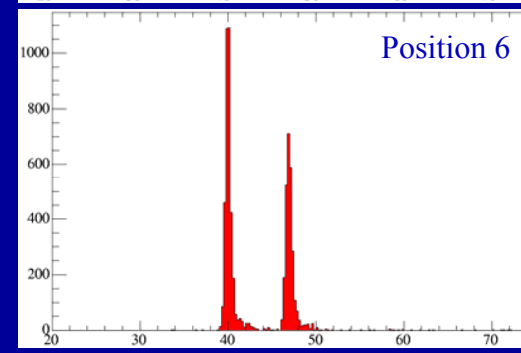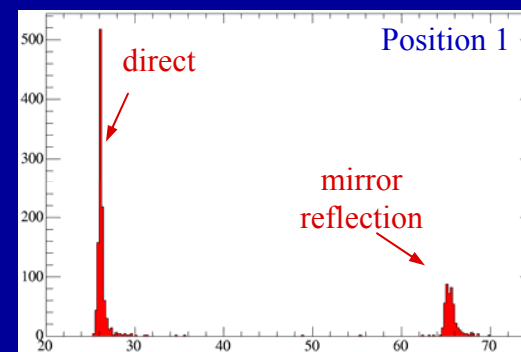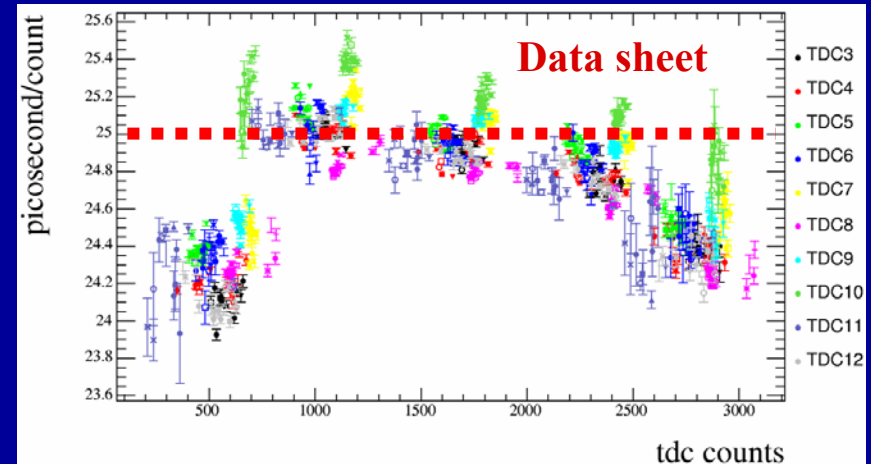


hit time (ns)

CHROMATIC BROADENING


→ IEEE NSS 2005

Example for one selected detector pixel in position 1


- First peak ~ 81 cm photon path length
- Second peak ~ 930 cm photon path length
- Measure time of propagation (TOP)
- Calculate expected TOP assuming average $\langle \lambda \rangle \approx 410$ nm
- Plot Δ TOP: measured minus expected time of propagation
- Fit to double-Gaussian
- Observe clear broadening of timing peak for mirror-reflected photons

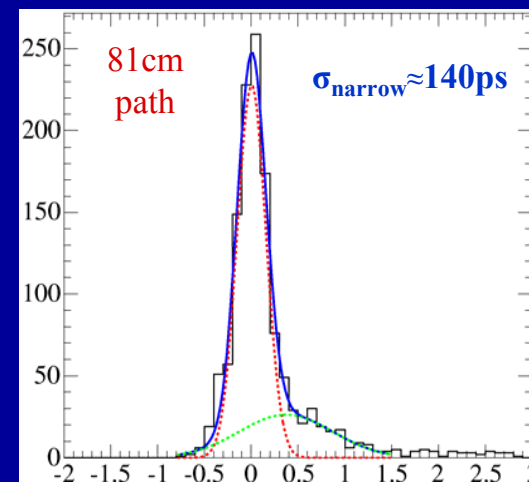

Δ TOP (ns)

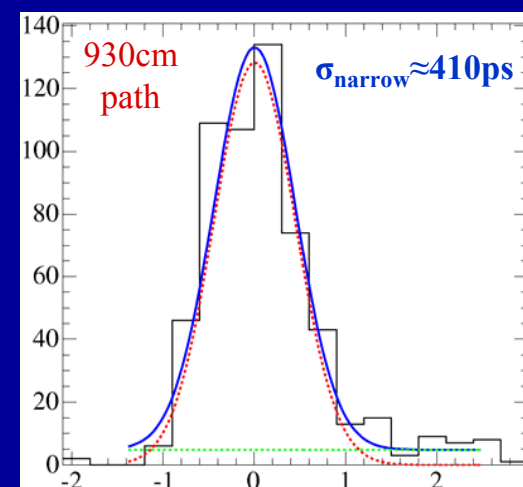


Δ TOP (ns)

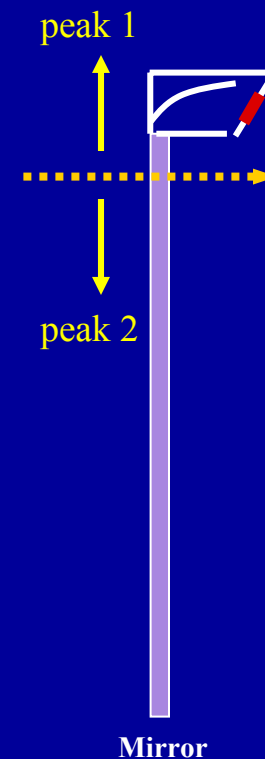

CHERENKOV ANGLE FROM TIME

Cherenkov angle from time of propagation (TOP)


- Use measured TOP for each pixel
- Combine with calculated photon path in radiator bar
- Calculate group index $n_g(\lambda)$ from $n_g(\lambda) = c_0 \cdot \text{TOP} / \text{path}$
- Calculate refractive (phase) index $n(\lambda)$ from group index
- Calculate photon Cherenkov angle θ_c for $\beta=1$ $\theta_c(\lambda) = \cos^{-1}(1/n(\lambda))$
- Resolution of θ_c from TOP is 6-7mrad for photon path length above $\sim 4\text{m}$.
- Expected to improve with better calibration.

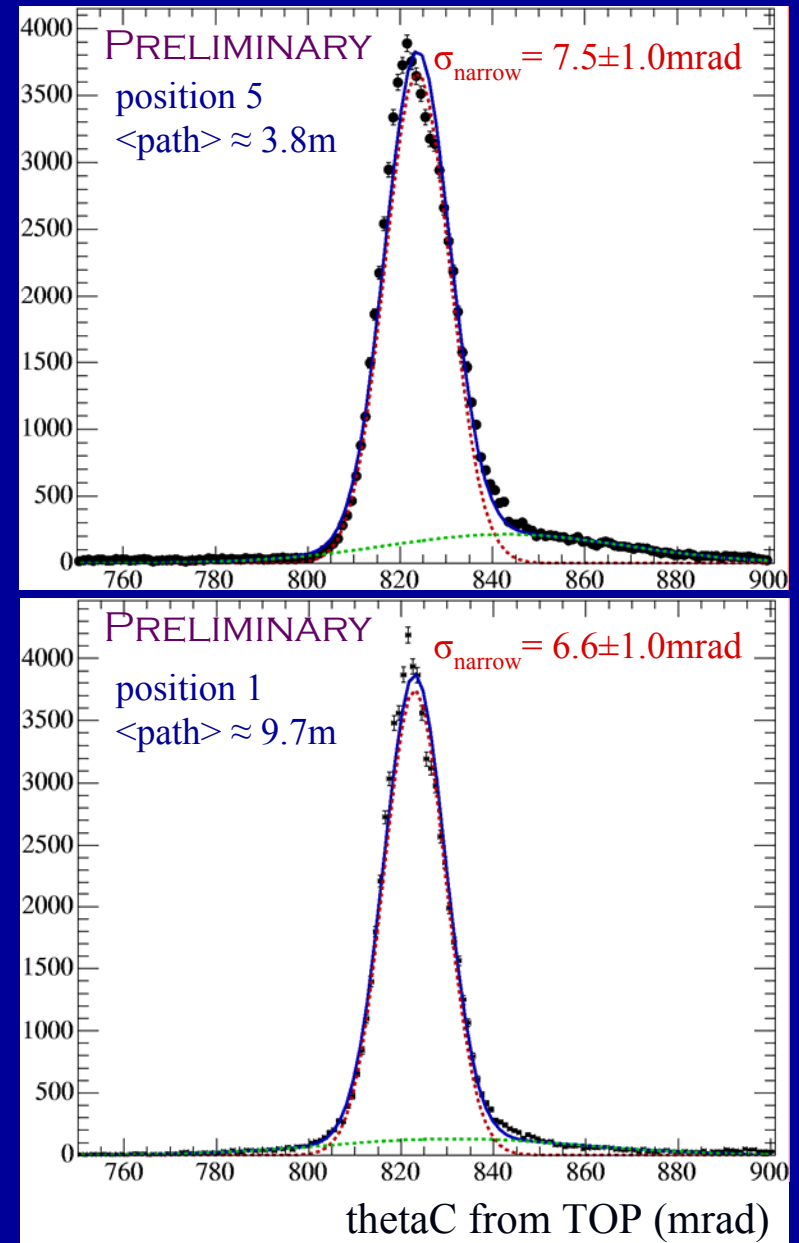

CHERENKOV ANGLE RESOLUTION

Summary of preliminary results

- θ_c resolution from pixels is 14-16mrad for entire range.
- θ_c resolution from time of propagation improves rapidly with path length, reaches plateau at 6-7mrad after approx. 4m photon path in bar.
- Next steps: complete calibration and systematic checks, attempt correction of chromatic production term.

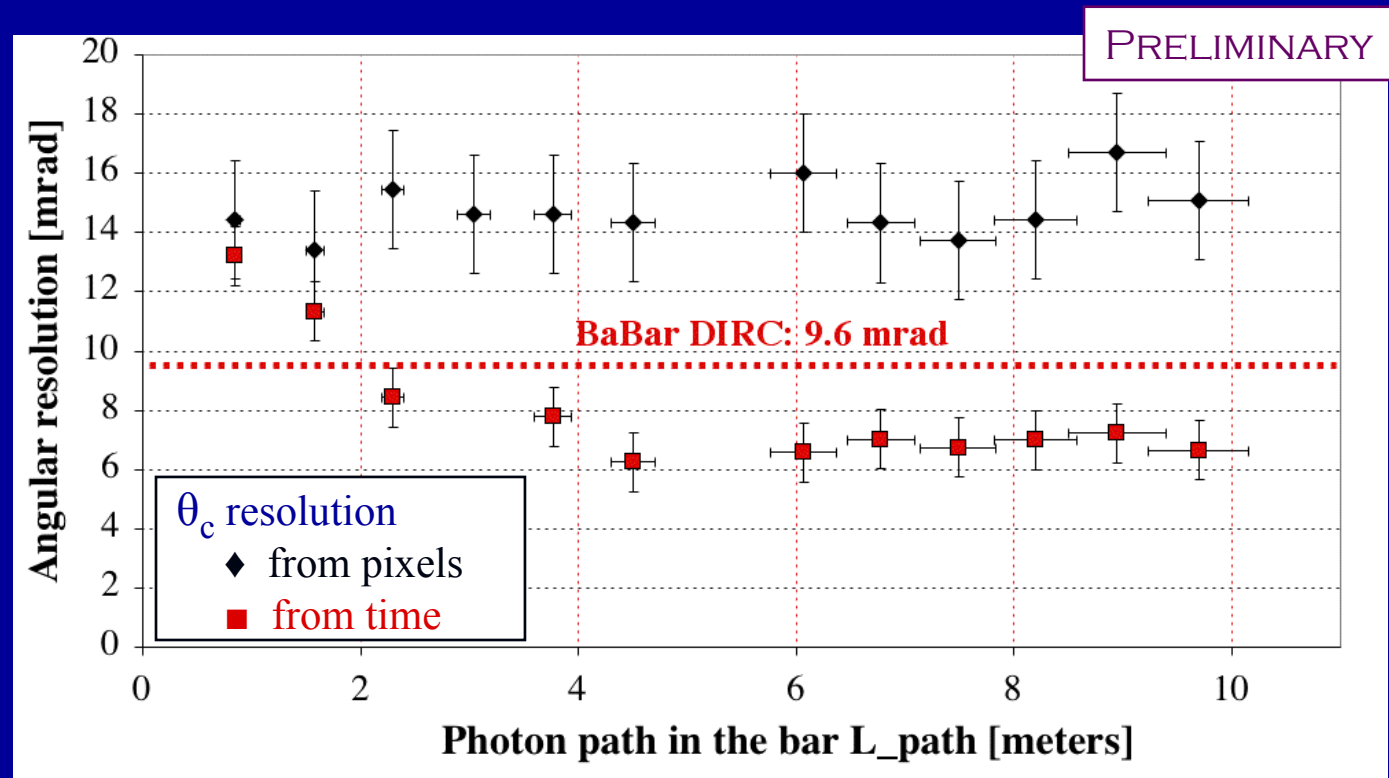

PLAN FOR FUTURE PROTOTYPE TESTS

Next beam test of prototype is planned for summer 2006

- plan to add new photon detectors:
 - new 1024 pixel Burle MCP-PMT
 - new 256 pixel Hamamatsu Multianode PMT
 - new small cathode-to-MCP gap 64 pixel Burle MCP-PMT
- 256/1024 pixel PMTs will have modified readout combining pixels into 4×16 pseudo-pixels, 64 channels
 - provide finer segmentation in vertical direction
 - minimize pixelization effects, provide better θ_c resolution from pixels for chromatic correction.
- possibly add a second fiber hodoscope behind prototype to reject tracks with large scattering angle in bar

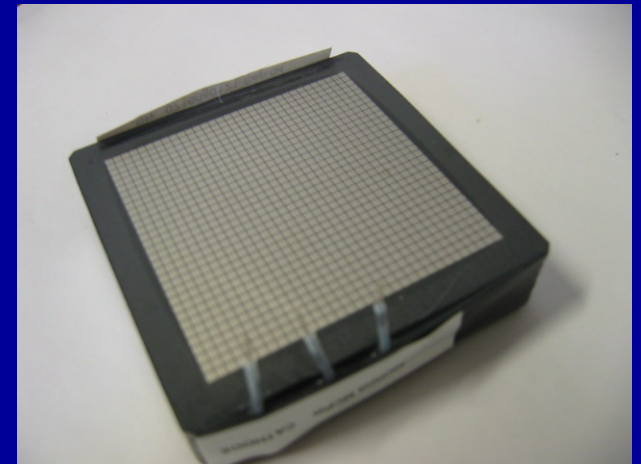


Photo of new 1024 pixel
Burle 85021-600 MCP-PMT


BURLE 85011-430




Burle 85011-430 MCP-PMT

- 64 pixels (8×8), 6.5mm pitch
- bialkali photocathode
- 25μm pore MCP, small 0.75mm MCP-cathode distance
- gain $\sim 5 \times 10^5$
- timing resolution ~ 90 ps, much smaller tail
- OK uniformity

→ IEEE NSS 2004

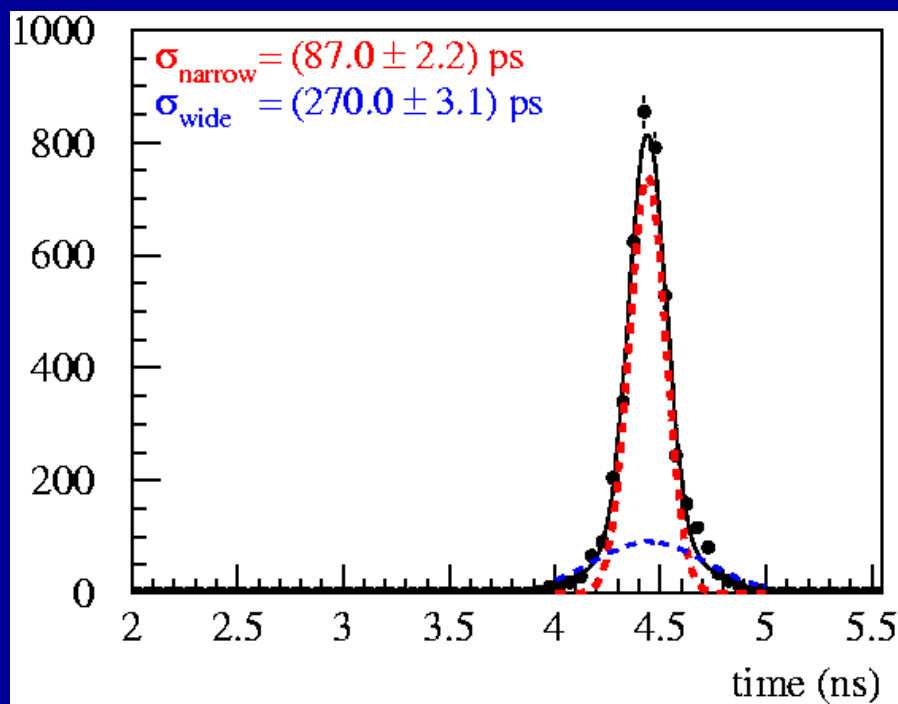



Efficiency relative to Photonis PMT

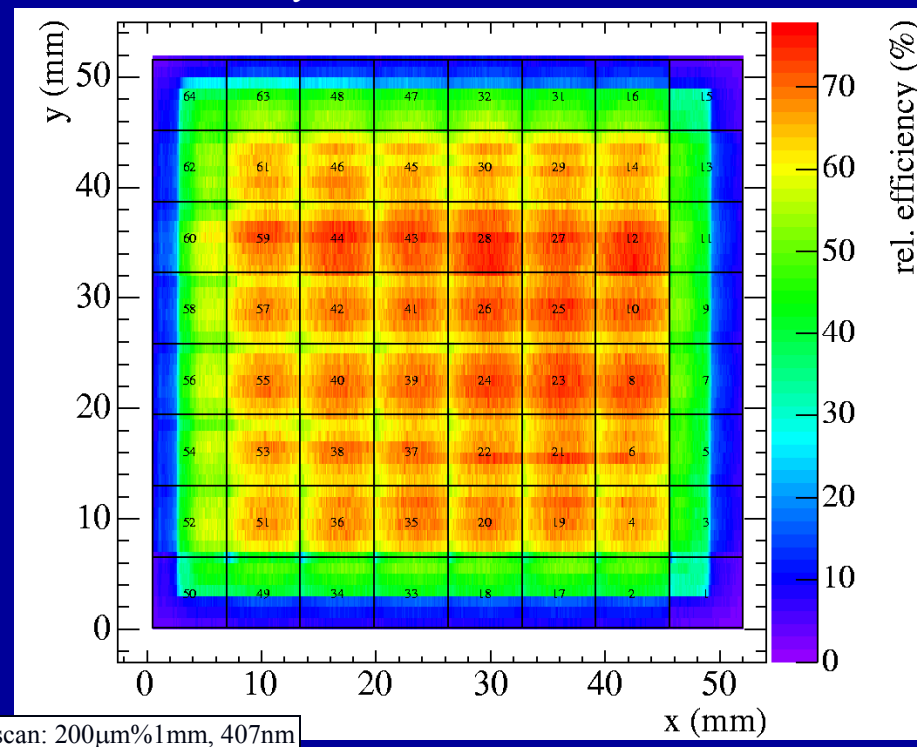


HAMAMATSU H-9500

Hamamatsu H-9500 Flat Panel Multianode PMT

- bialkali photocathode
- 12 stage metal channel dynode
- gain $\sim 10^6$
- typical timing resolution $\sim 220\text{ps}$
- 256 pixels (16 \times 16), 3 mm pitch
- custom readout board – read out as 4 \times 16 channels

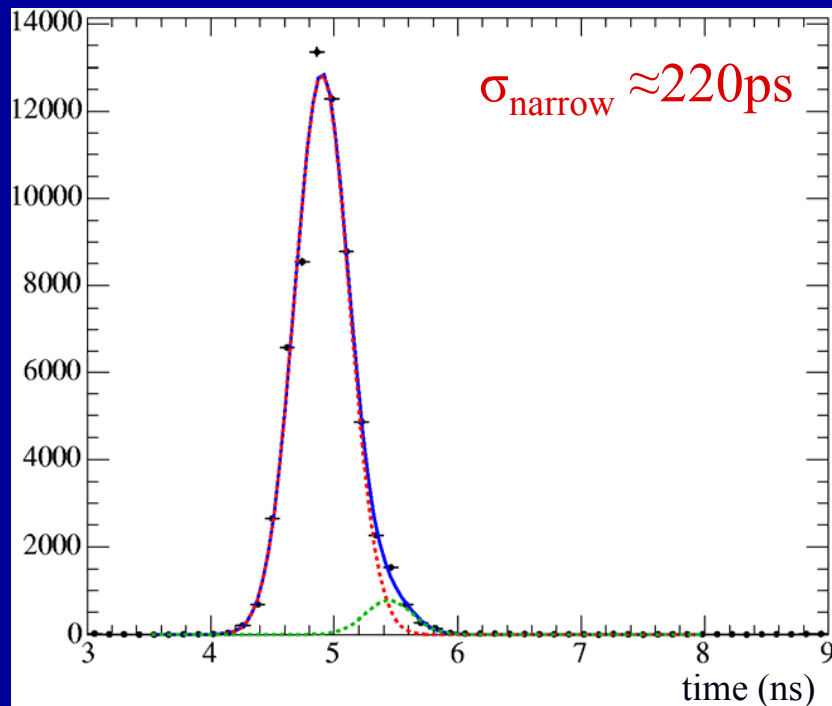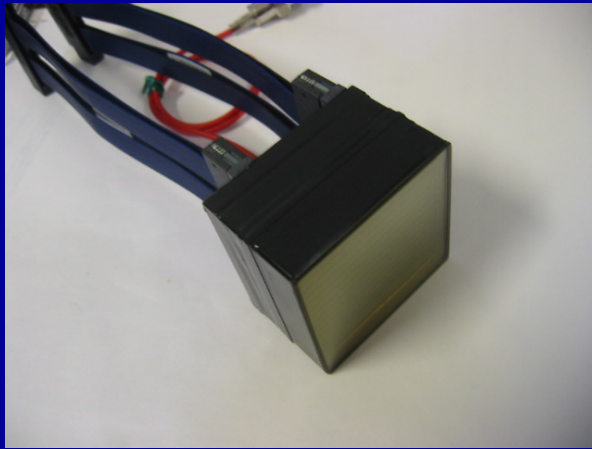


Efficiency relative to Photonis PMT

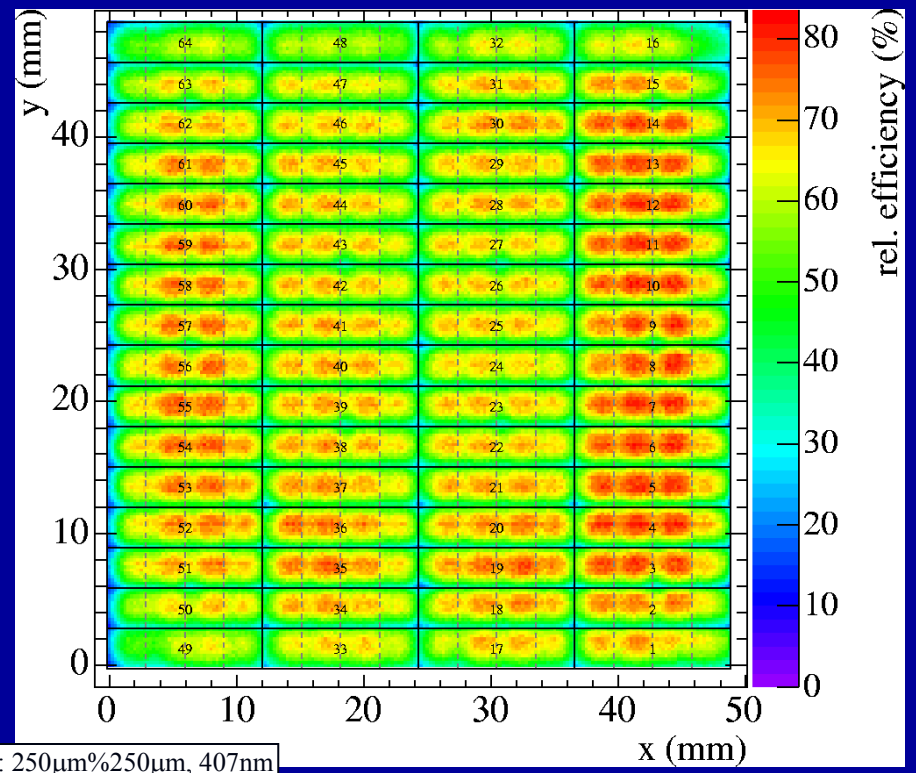

SUMMARY

- Six years of experience in PEP-II/BABAR B-factory mode: DIRC successful, very reliable, robust, easy to operate, plays significant role in almost all BABAR physics analyses.
- Focusing DIRC R&D has identified several PMT candidates capable of delivering timing resolution of $<140\text{ps}$ with good uniformity and efficiency. Remaining questions include: behavior in magnetic fields, aging, rate capability.
- Focusing DIRC prototype is a challenging detector, requiring new approaches to calibration, monitoring, software design, etc.
- 3D readout makes system more complex but also more robust, helps with backgrounds and calibrations. Redundancy makes correction of chromatic production error possible.
- Test beam data for prototype show interesting initial results
 - Timing resolution sufficiently good to determine θ_c with precision better than BABAR-DIRC resolution.
 - $\sigma(\theta_c) \approx 6 - 7\text{mrad}$ for photon path $> 4\text{m}$
- We are looking forward to the next beam test run with an improved prototype this summer.

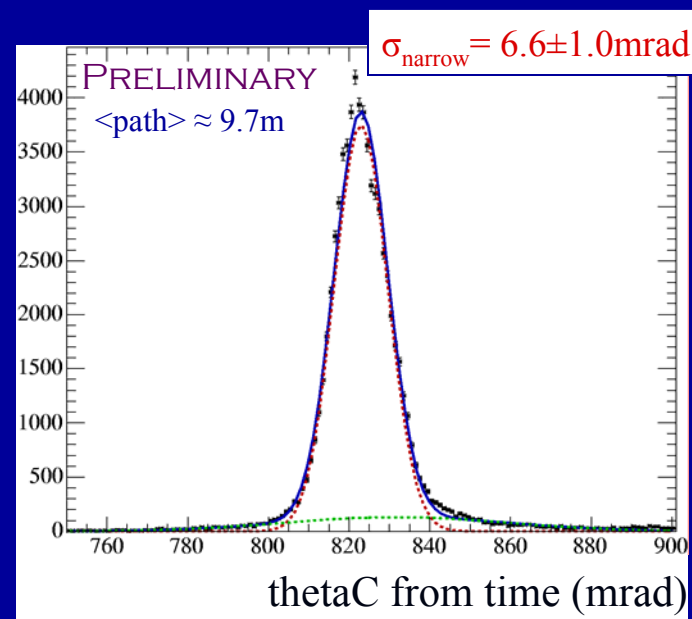

EXTRA MATERIAL

BEAM TEST SETUP



Setup in End Station A: movable bar support and hodoscope




Setup in End Station A




Electronics and cables




Photodetector backplane

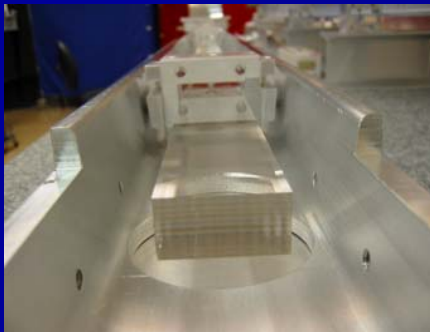

Radiator bar

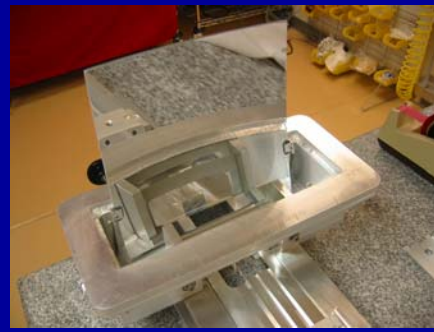

Mirror

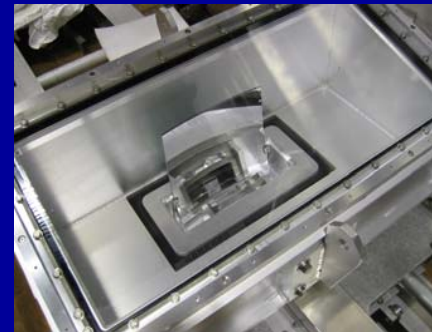

Oil-filled detector box:



Start counters, lead glass

BABAR-DIRC RECONSTRUCTION


Time information provides powerful tool to reject accelerator and event related background.

Calculate expected arrival time of Cherenkov photon based on



- track TOF
- photon propagation in radiator bar and in water

Δt : difference between measured and expected arrival time

± 300 nsec trigger window
(~500-1300 background hits/event)

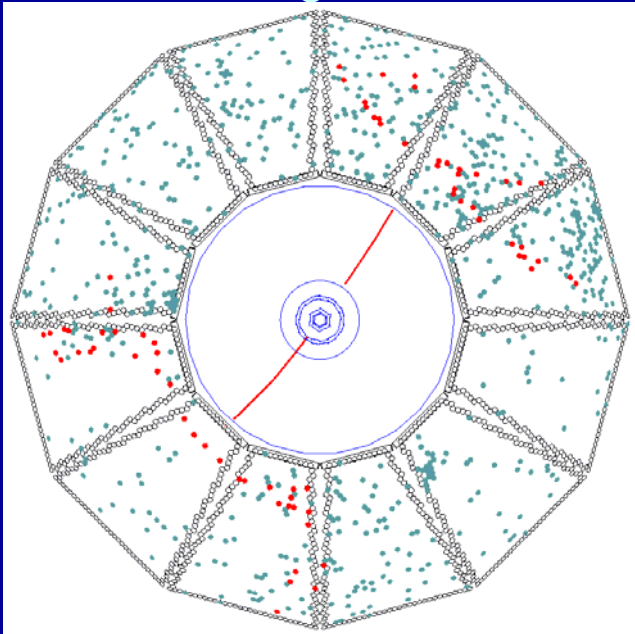

± 8 nsec Δt window
(1-2 background hits/sector/event)

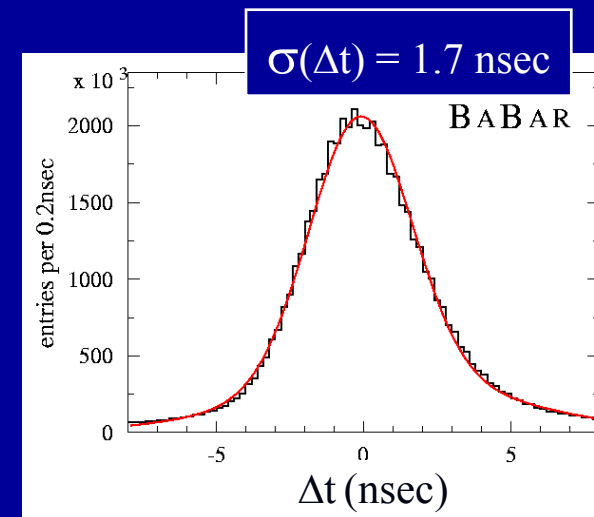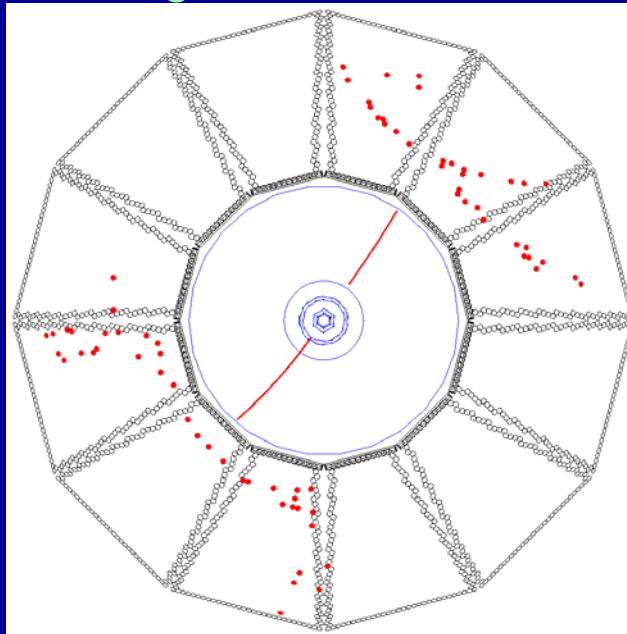

*Thanks to the
BABAR-DIRC
group for the plots.*

PHOTON DETECTOR SCANS

Light source

- PiLas pico-second laser
- $\lambda = 407 \text{ nm}$ or $\lambda = 635 \text{ nm}$
- FWHM pulse $< 35 \text{ ps}$
- Operated in single photon mode

Motion Controller

- GPIB bus, positioning repeatability $< 7 \mu\text{m}$

Laser Intensity Monitoring


- Two conventional PMTs for monitoring
- Photonis XP2262B, ETL 9125FLB17

Amplifiers

- Elantec $130\times$ voltage gain, 2 GHz bandwidth

Readout

- SLAC-built constant fraction discriminator
- Phillips 7186, 25 ps per count TDC
- CAMAC based readout, linux PC

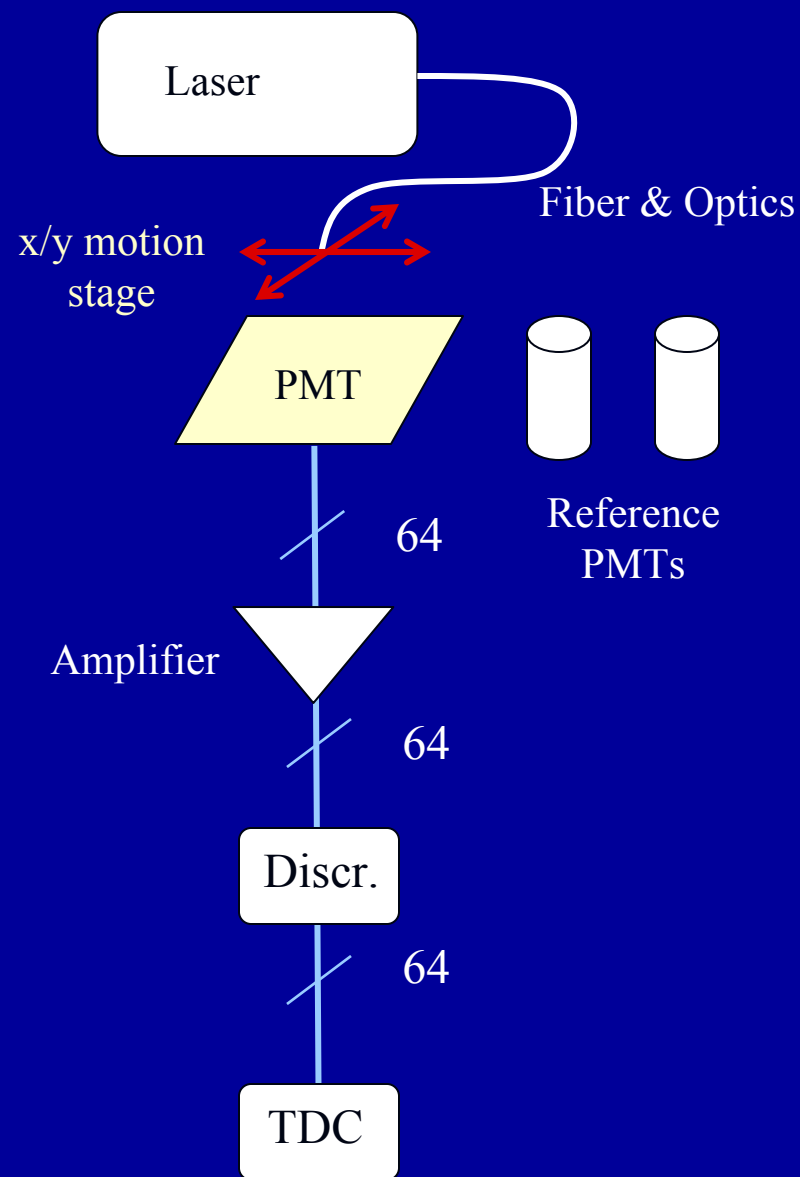

→ IEEE NSS 2003


DIRC RECONSTRUCTION

Precisely measured detector pixel coordinates and beam/track parameters

→ Pixel with hit $(x_{\text{det}}, y_{\text{det}}, t_{\text{hit}})$ defines 3D photon propagation vector in bar and Cherenkov photon properties (*assuming average wavelength*)

$\alpha_x, \alpha_y, \cos \alpha, \cos \beta, \cos \gamma, L_{\text{path}}, n_{\text{bounces}}, \theta_c, \phi_c, t_{\text{propagation}}$

Use GEANT4 simulation and stand-alone ray-tracing software to obtain propagation vector for each pixel.


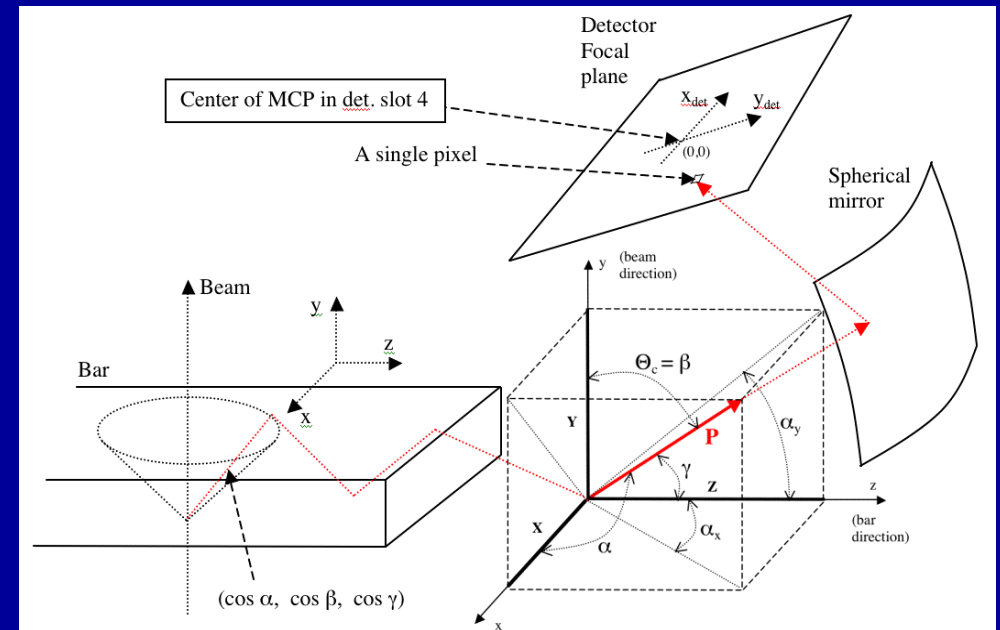


→ IEEE NSS 2005

CHARGE SHARING


Charge can be shared between anode pads
if the photon hits close to the boundary between pixels.

If signals are detected simultaneously on two or more neighboring pads
this signature can be used to constrain the photon hit position more
precisely and improve thetaC resolution.

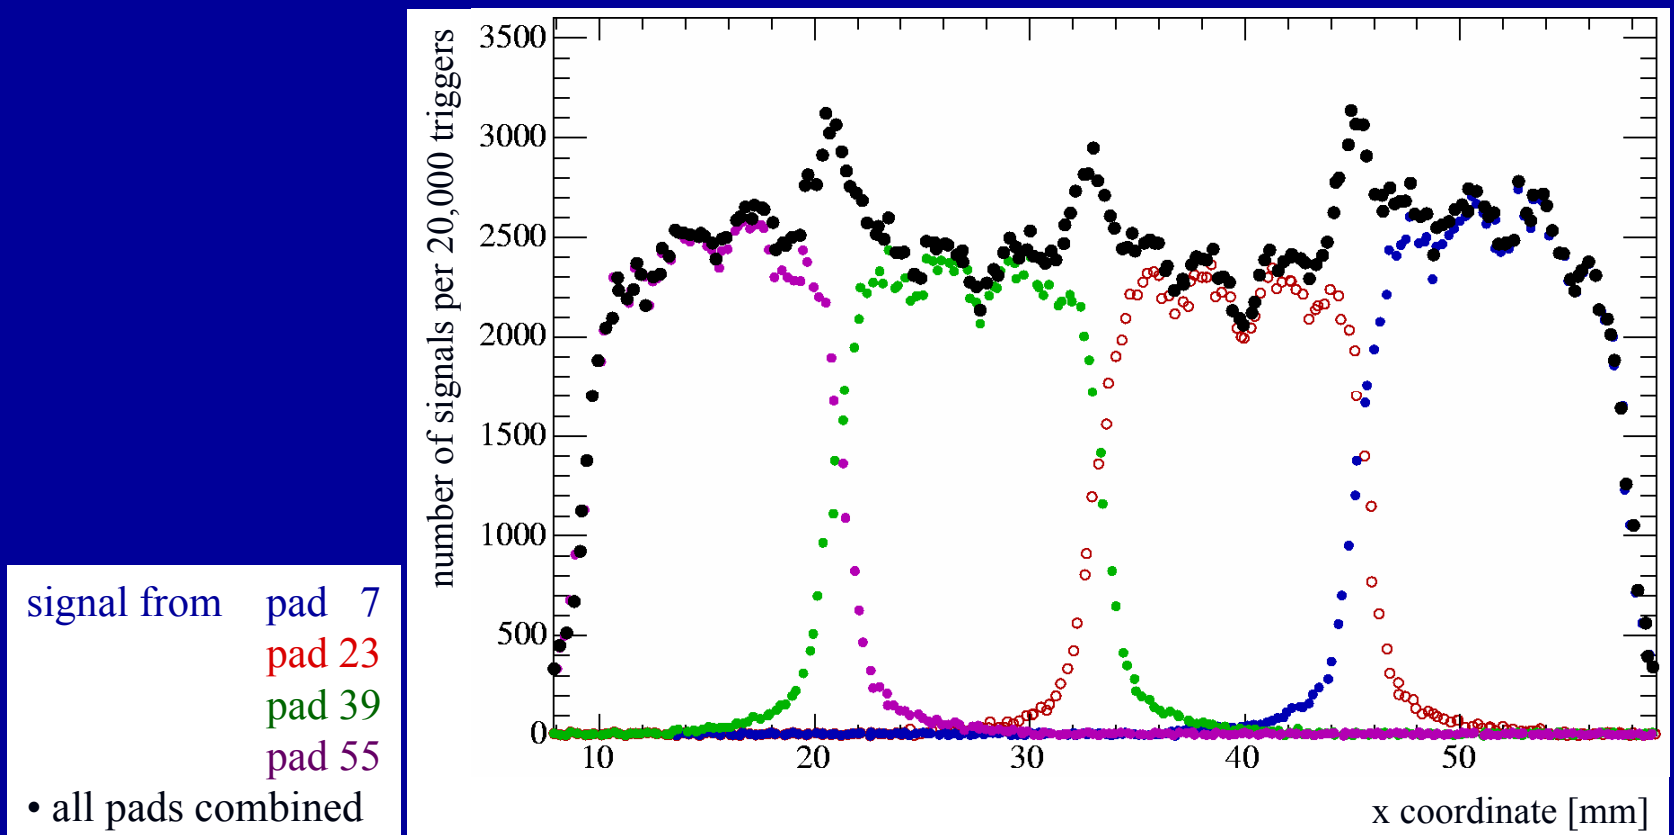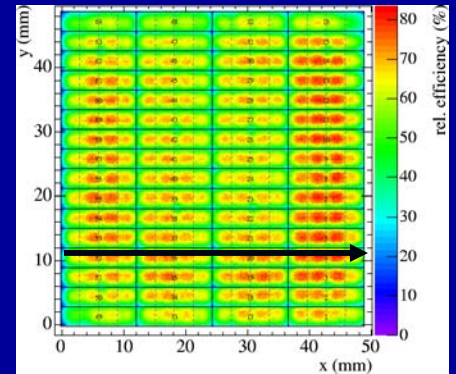

VARIOUS EFFICIENCIES IN THE FOCUSING DIRC

Spreadsheet calculation:

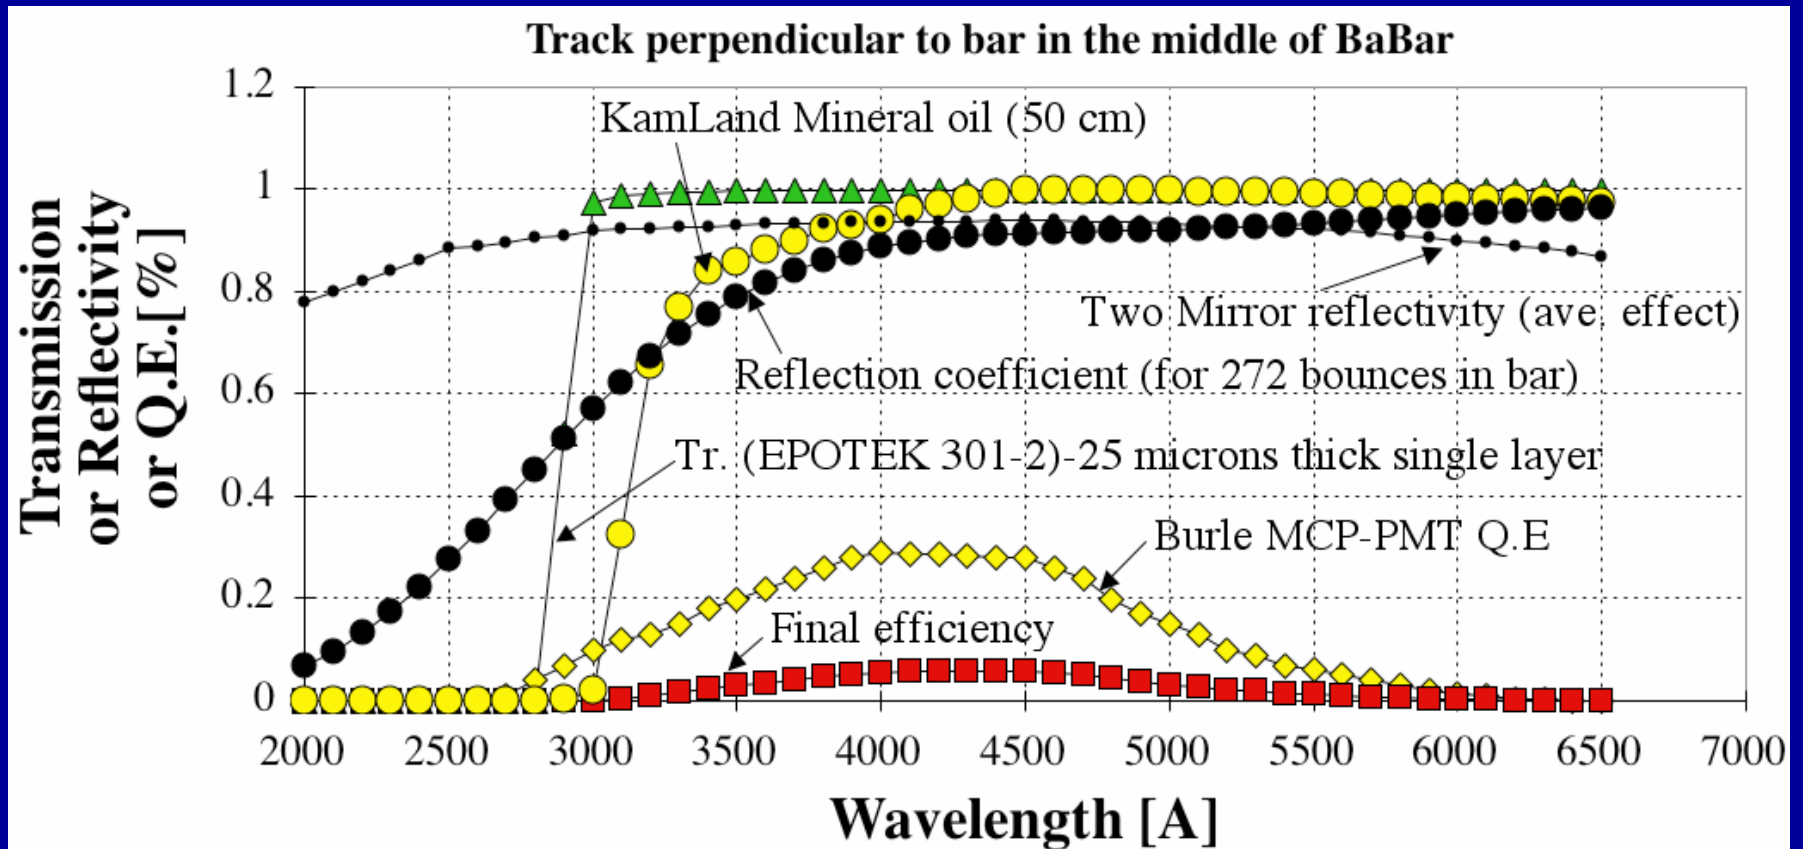

- Assume: “Focusing DIRC prototype-like” DIRC is in the present BaBar.
- Burle QE peaks at higher wavelength than the Hamamatsu MaPMT or ETL PMT.

→ RICH 2004

CHROMATIC EFFECTS

Compare measured resolution from time of propagation to expected resolution

model assumes 90° track angle and Focusing DIRC bandwidth

→ SLAC-J-ICFA-22-2


Short path length:

θ_c resolution dominated
by timing resolution


Long path length:

θ_c resolution dominated by chromatic
dispersion of group index $n_g(\lambda)$

MODEL EXPECTATION

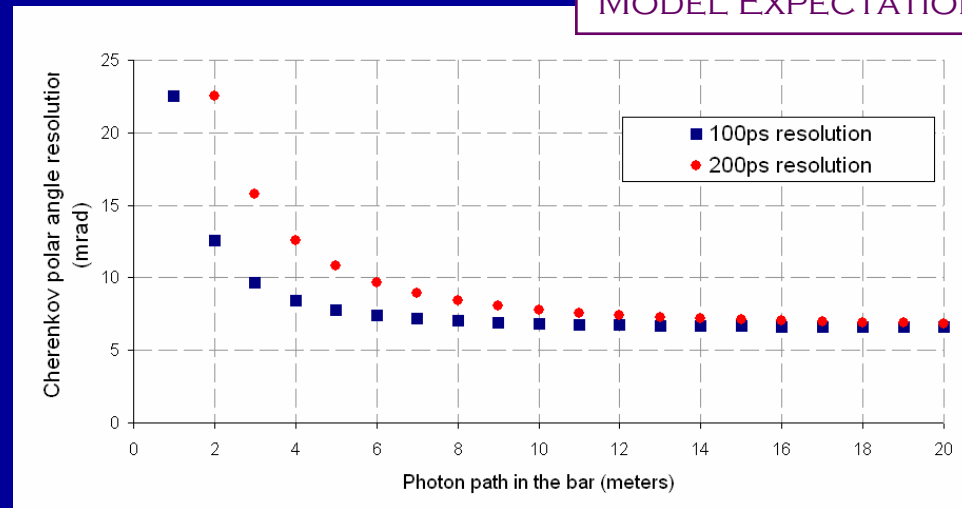


FOCUSING DIRC , PRELIMINARY

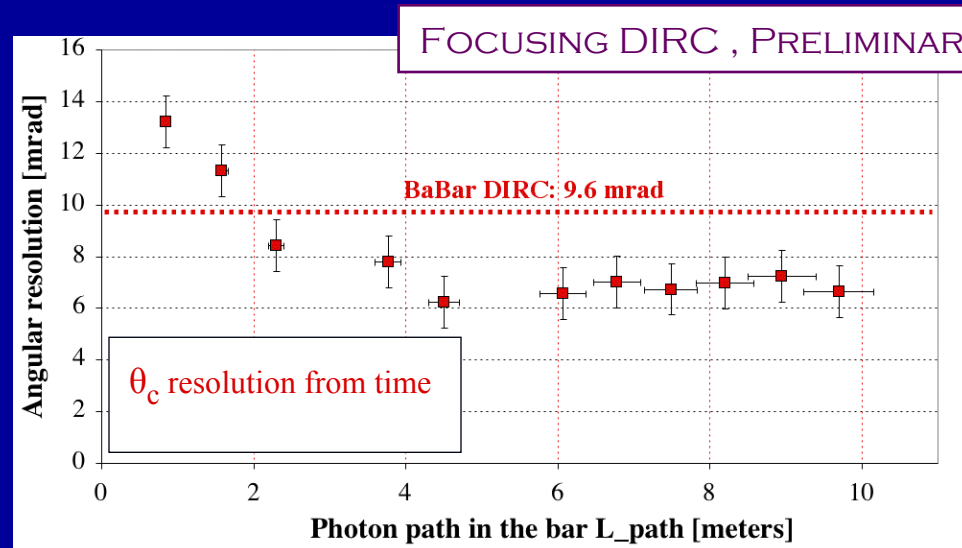

TOWARDS A CORRECTION OF THE CHROMATIC ERROR

$\theta_c(\text{TOP})$ measurement is equivalent to determination of photon wavelength


Graph shows measured photon wavelength compared to the expected wavelength spectrum for a device with perfect timing resolution.

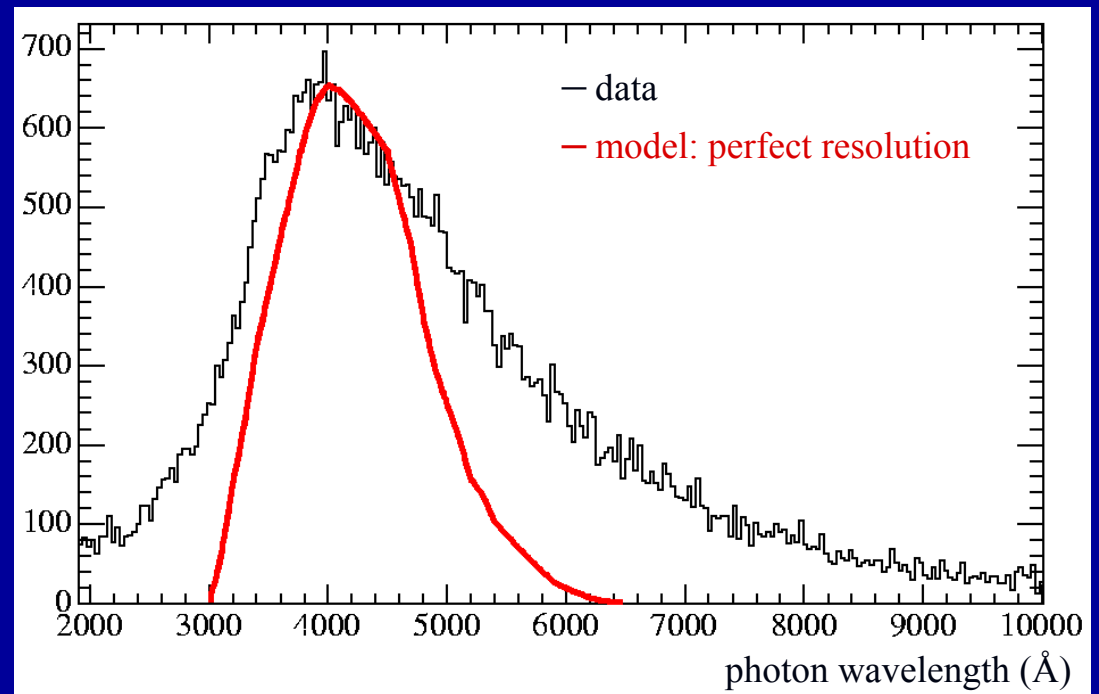

TOWARDS A CORRECTION OF THE CHROMATIC ERROR

Simple first approach:

- use $\theta_c(\text{TOP})$ as measurement of required correction
- assume full correlation between pixel and TOP measurement
- correction: difference between measured $\theta_c(\text{TOP})$ and expected average $\theta_c(\lambda=410\text{nm})$
$$\Delta\theta_c = \theta_c(\text{TOP}) - 822.1\text{mrad}$$
- $\theta_c(\text{corrected}) = \theta_c(\text{pixel}) - \Delta\theta_c$
- clearly does not combine measurements in optimum way
- this approach slightly improves resolution

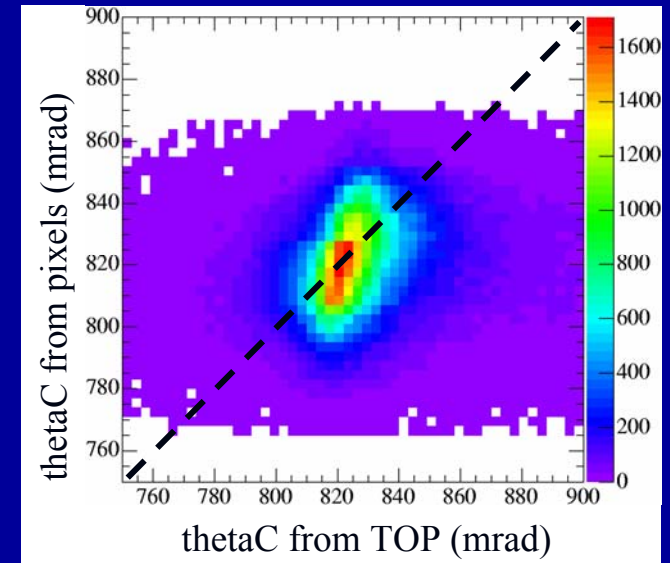

Ultimately will want to use full likelihood analysis using all observables.

